



**DALY INDUSTRIAL**  
**SUPPLY CO. LTD.**

Distributing equipment throughout Ireland since 1984



**EQUIPMENT CATALOGUE 2017/2018**



# Contents



<b>AIR COMPRESSORS</b>	<b>3</b>
<b>AIR TOOLS</b>	<b>5</b>
<b>BATTERY CHARGERS &amp; BOOSTER PACKS</b>	<b>7</b>
<b>CABLE AVOIDANCE &amp; CABLE REELS</b>	<b>8</b>
<b>CLEANING EQUIPMENT</b>	<b>10</b>
<b>COMPACTION</b>	<b>13</b>
<b>CONCRETE CUTTING</b>	<b>19</b>
<b>CONCRETE FINISHING</b>	<b>24</b>
<b>MINI DUMPERS</b>	<b>30</b>
<b>DEHUMIDIFIERS</b>	<b>32</b>
<b>ACCESSORIES</b>	<b>34</b>
<b>FLOOR FINISHING &amp; EQUIPMENT</b>	<b>41</b>
<b>GARDENING CARE EQUIPMENT</b>	<b>43</b>
<b>GENERAL PURPOSE ENGINES</b>	<b>45</b>
<b>GENERATORS</b>	<b>48</b>
<b>HEATING &amp; COOLING</b>	<b>58</b>
<b>HYDRAULIC &amp; PNEUMATIC BREAKING</b>	<b>66</b>
<b>LOG HOLDERS &amp; SPLITTERS</b>	<b>68</b>
<b>PAINTING &amp; DECORATING</b>	<b>70</b>
<b>PLUMBING</b>	<b>72</b>
<b>POWER TOOLS</b>	<b>73</b>
<b>PADDLE MIXING</b>	<b>89</b>
<b>CONCRETE CORING</b>	<b>90</b>
<b>POWER WASHERS</b>	<b>91</b>
<b>POWER WASHER ACCESSORIES &amp; PARTS</b>	<b>98</b>
<b>SITE LIGHTING &amp; ELECTRICAL ACCESSORIES</b>	<b>100</b>
<b>TRAFFIC SIGNALS</b>	<b>102</b>
<b>WATER PUMPS</b>	<b>104</b>
<b>WELDING EQUIPMENT</b>	<b>106</b>



# Air Compressors

## DIRECT DRIVE Lubricated

A range of air compressors consisting of various models designed for professionals.

## BELT DRIVE Lubricated

The series of FIAC piston compressors with belt transmission from 2 to 20 HP are equipped with the powerful and reliable two-cylinder, single stage and two stage AB compressor units, already lubricated with oil.



**FIAC 2HP DIRECT DRIVE 24L/50L**

**CODE: CMP0005A5**

**CODE: CMP0005A4**



**PREDATOR 2HP 50L**

**CODE: CMP003**



**PREDATOR 5 PC AIR KIT**

**CODE: SHT001B**



**FIAC 2HP BELT DRIVE**

**CODE: CMP0005A3**



**FIAC 3HP BELT DRIVE**

**CODE: CMP0005A2**



**FIAC 5.5HP BELT DRIVE/ 3 PHASE**

**CODE: CMP0005F**

Model	Cosmos 225/255		Predator 2HP 50L	Fiac 100L 2HP Belt Drive	Fiac 200L 3HP Belt Drive	Fiac 5.5HP Belt Drive
Power (Hp)	2	2	2	2	3	5.5
Tank Size (L)	24	50	24	100	200	300
Voltage (V)	230/50/1	230/50/1	230/50/1	230/50/1	230/50/1	400/50/3
Air Delivery (CFM)	6	6	6.7	8.8	11.6	19.4
Weight (Kg)	24	32	26	62	102	143
Pressure (Bar)	8	8	8	8	8	8



# Air Compressors

## PORTABLE AIR COMPRESSORS

The CompAir range includes portable compressors and compressed air tools for construction, along with stand-alone compressor packages for many other industrial applications.



**COMPAIR C30  
AIR COMPRESSOR 108CFM**

**CODE: CMP0006**

**COMPAIR C50  
AIR COMPRESSOR 180CFM**

**CODE: CMP0008A**



**COMPAIR C76  
AIR COMPRESSOR 275CFM**

**CODE: CMP0008B**

MODEL	C30	C50	C76
Volume Flow (m <sup>3</sup> /min)	3.0	5.0	7.6
Operating Pressure (bar)	7	7	7
Compressed air outlets	2x3/4"	2x3/4"	3x3/4" + 1x1 1/2"
Engine	Kubota V1505	Yanmar 4TNV88BKCP	Cummins B3.3 TAA
Installed engine power (Kw)	23.1	35.0	63
Engine off load speed (1/min)	1800	1600	1700
Engine full load speed (1/min)	2600	2800	2600
Full tank capacity (L)	40	60	140
Operating Weight (Kg)	610	810	1240
Height	adjustable with brake	adjustable with brake	adjustable with brake
Power Sound Level dB(A) LWA	98	98	99
Pressure Sound Level dB(A) LPA	69	69	71
Overall Dimensions (LxWxH)mm	3227 x 1200 x 1194	3797x1490x1327	3965x1700x1440



# Air Tools

Macdonald breakers will suit any type of job. Designed to withstand the extreme demands of the plant hire industry, combined with the light weight preferred by the utilities and local authorities



**DM5S SMALL STANDARD  
CHIPPING HAMMER**

**CODE: CMA0202**



**DM11S MEDIUM STANDARD  
BREAKING HAMMER**

**CODE: CMA0201A**



**DP11VRS MEDIUM VIBRATION  
REDUCED BREAKING HAMMER**

**CODE: CMA0201**



**284S STANDARD  
LARGE BREAKER**

**CODE: CMA0200**



**28SVRT VIBRATION REDUCED  
LARGE BREAKER**

**CODE: CMA0200A**

Model	DM5S	DM11S	DP11VRS	284S	28SVRT
Chuck Size (mm)	19 x 50	22x 82.5	22 x 82.5	32 x 160	32 x 160
Weight (Kg)	5.4	11.1	13kg	32.50	32 kg
Air Cons (CFM)	16	30	40	65	56





**MS3VR 3 HEAD SCABBLER**

MS3-VR Vibration Reduced triple head scabblers are designed for medium duty work in de-scaling, laitence removal and concrete repair. The tools are made to the same high standards for reliable and durable performance as other tools in the range but are vibration reduced to allow the operator longer continuous use.

**CODE: CP0050**



**AIR BLOW LANCE**

The Macdonald Air Blow Lance produces high pressure air flow used for clearing out areas from dust, leaves, etc., often used for concrete preparation.

**CODE: MAC207940**



**1UFTVR POLE SCABBLER**

For use in awkward corners and edges where walls and floor surfaces meet.

**CODE: CPS0008**

MODEL	MS3VR	1UFTVR
Heads (qty)	3	1
Weight (kg)	4.5	16.5
Length (mm)	635	1320
Height (mm)	178	-
Working Width (mm)	75	75
Air Cons (CFM)	25	25
Rec. W/kg (bar)	6	6
Hose Fitting	1/2"	3/4"



# Battery Chargers & Booster Packs



**MAX 18  
BATTERY CHARGER**  
**CODE: DPT088B**



**CD50R BOOSTER  
CHARGER**  
**CODE: DPT091**



**CD600R BOOSTER  
CHARGER**  
**CODE: DPT092**

MODEL	MAX18	CD50R	CD 600R
Input Voltage (V)	230	230	230
Rated Working Capacity (Kw)	200w	1.2kw Charge 7kw Start	2kw charge 12kw start
Max Starting Current (A)	-	180	360
Charge Voltage	12 / 24	12 / 24	12/24
Effective Charging Current (A)	14 / 9	45	90
Rated Charging Current (A)	8 / 5	35	60
Fuse (A)	-	16	20
Weight (Kg)	7.2	14.5	26
Size (Cm)	26 X 23 X 19.7	32.5 X 31 X 21.5	40.5 x 31.5 x 61.5

**12/24 VOLT BOOSTER PACK**  
**CODE: DPT080**

Voltage (DC Volts)	12V/24V
Cranking Amp	1200A-12V/600A-24V
Peak Amp	2400A-12V/1200A-24V
Battery	2*22AH sealed lead acid
Internal Battery Status Display	Color Coded Voltmeter
Charging Mode	Float charge
Power Outlet	1x12V
Worklight	Yes
Weight (G.W.)	-



# Cable Avoidance & Cable Reels

EZiSYSTEM™ has been specifically designed to reduce human error and to increase site safety with its intelligent and unique features. EZiSYSTEM™ makes locating underground cables and pipes a simple and speedy task, increasing your onsite safety and ultimately saving time and money.

## COBRA RODDING SYSTEM CABLE REELS

Continuous Pipe and Duct Rodding Systems. The 'Medi Cobra' rodding system gives a compact and labour saving solution whether installing cables in ducts, threading draw ropes through pipes or surveying drains with CCTV cameras.

- Rugged - Robust, zinc plated steel frames
- Reliable - Highest quality, fibreglass rod radially reinforced construction
- Cost-effective - Faster and more economic than screw together drain rods

ROD THICKNESS/ LENGTH		CODE
6mm	60M	MSS0079E
6mm	80M	MSS0079D
6mm	100M	MSS0079F
9mm	80M	MSS0079B
9mm	120M	MSS0079C
9mm	150M	MSS0079G
11mm	150M	MSS0079H
11mm	250M	MSS0079
Other sizes available on request.		



- ROD: Highest quality 6/9/11mm coated reinforced fibreglass rod
- FITTINGS: Brass end fittings with smooth profile aluminium guiding tip
- FRAME: Rugged steel construction, Zinc plated
- SAFETY BRAKE: Integral fully adjustable brake system fitted as standard
- WHEELS: Frame also available with optional wheel kits at extra cost.



### EZICAT i500

Rugged cable avoidance tool, designed to locate and trace buried conductive services which radiate electromagnetic signals.

**CODE: US008**



### SIGNAL CLAMP

Provides a direct connection from the EZiTRACE to metallic pipes, cables, etc. (max. 100 mm outside diameter)

**CODE: US014**



### EZICAT i550

All the same functionality as the EZICAT i500, with the added benefit of service depth estimation, when used in conjunction with the EZiTRACE signal generator or Sonde in 8/33 kHz mode.

**CODE: US008A**



### EZIROD 50M SERVICE TRACER

Allows tracing of plastic ducts, clay drains and other non-conductive conduits.

**CODE: US0011**



# Cable Avoidance & Cable Reels

## WASP BOX LOCATOR / METAL DETECTOR

The WASP box locator / metal detector has become an industry standard metal detector within the water industry. This metal detector is simple to use with just two controls, Fine and Coarse tuning, and provides good depth penetration, rugged reliability and is economically priced at half the cost of anything comparable. Along with its distinctive and highly visible yellow and black colouring, these features are why it has established itself so successfully within the industry.

**CODE: MSP004**



## ELCOMETER P500 VALVE BOX LOCATOR / METAL DETECTOR

The Elcometer P500 Valve Box Locator / metal detector has been designed to locate the presence of sub surface pipeline valve boxes.

**CODE: US011**



## DUAL FREQUENCY

Sonde 38mm diameter signal transmitter used to trace drains, sewers and other non-conductive services. Can be attached to drain rods, boring tools, inspection cameras, etc.

**CODE: US010**



## EZITRACE SIGNAL GENERATOR

Improves buried service detection by applying a traceable signal to conductive services where no signal is present. (incl. batteries, connection cable set, earth spike & user manual)

**CODE: US009**



## EZISYSTEM CARRY BAG

Bag carries the main components of the System EZISYSTEM (EZICAT and EZITRACE) & accessories. Constructed from rugged fabrics and complete with shoulder strap.

PREDATOR INDUSTRIAL FLOOR CLEANER

Multi Function Cleaning Machine

This Predator Floor Cleaner has 4 x main functions: Floor Washing, Carpet Cleaning, Polishing & Low speed cleaning wr makes it a very versatile machine for the Tool Hire industry.

Motor Power (W)	1200
Deck Size (mm)	450
Brush (mm)	450
Speed (rpm)	175
Cable Length (m)	12
Weight (Kg)	60.5

CODE: DVAC015



SABRINA CARPET CLEANING MACHINE

The Sabrina is specially designed to clean small areas of carpet and hard floors. Even though it is compact, the Sabrina is suitable for professional use.

Cable Length (m)	10
Cleaning Width (mm)	2700
Construction Material Polythene	Expanded
Hose Assembly	
Length (m)	2.5
Machine Size (cm)	300 x 420 x 530
Machine Weight (kg)	12
Number of Jets	one (02)
Recovery Tank Capacity (L)	14
Solution Tank Capacity (L)	14

CODE: VP009

SANTOEMMA T-CLEAN

T-CLEAN is particularly indicated for cleaning carpet and upholstery with injection extraction machines. Its excellent cleaning power and low foaming properties allow a quick and effective action. A delicate scent is left after cleaning.

CODE: TCLEAN1





# Cleaning Equipment



## PREDATOR 3 SPEED INDUSTRIAL FLOOR DRYER

This Predator 3 Speed Industrial Floor Dryer has a powerful 850w motor. This 3 x speed Motor produces strong air flow, improving air moving and drying. We recommend using this tool in conjunction with Carpet cleaning and dehumidifying as it can significantly reduce drying time.

Voltage	220V / 50Hz
Weight (kg)	16
Cable Length (m)	6
Weight (kg)	18
Speed	3 -Speed

CODE: DVAC019



**VELO PRO AIR MOVER 230V**  
**CODE: F505-230V UK**



**DRI POD FLOOR DRYER**  
**CODE: F451230**

We recommend using this tool in conjunction with Carpet cleaning and dehumidifying as it can significantly reduce drying time.

Model	Velo Airmover	DriPod
Power (W)	124	124
Weight (Kg)	9.52	4.8
Speeds	1 -Speed	1 -Speed
Voltage (V)	230	230
HxWxD (cm)	22.9 x 45.7 x 58.4	38.5 x 38.5 x 22.5



**LIGHT INDUSTRIAL WET/DRY 15 LITRE VACUUM CLEANER**

- Full accessories included
- Acidproof and anti alkalis tank
- Collision resistant plastic tank
- Silent motor with powerfull suction suitable for long running times
- Ideal for resteraunts, hotels, small factories and other types of cleaning applications.

**CODE: DVAC016**



**INDUSTRIAL WET / DRY VACUUM CLEANER**

- Full accessories included
- Acidproof and anti alkalis tank
  - Collision resistant plastic semi transparent tank
  - Silent motor with powerfull suction suitable for long running times
  - Tank equiped with water drain
  - Ideal for large workshops , factories, stores and other types of cleaning applications.

**110V - CODE: DVAC001**

**220V - CODE: DVAC002**

Model	Discvac 1000	Discvac 2000	Discvac 3000
Power Input (W)	1000 Watt	2000 Watt	3000
Voltage (V)	110	110 Or 220	220
Drum Capacity (L)	15	90	90
Size (Cm)	56 x 34.5	95 x 44	95 x 44
Air Flow (L/S)	48	106	120
Fitting Size (Mm)	36	40	40
Approvals	Ce / Rohs	Ce / Rohs	Approvals: CE
Weight (Kg)	10	25	25

# Compaction

## CIMAR

Cimar is a heavy duty and durable range of light construction equipment is which includes plate compactors, Floor Saws, Tapping Rammers, concrete scabbler / grinders and more



### CIMAR CPC95

A mid class plate compactor which is ideal for rental and contractors use.

**CPC95 - CODE: CIMCPC-95**



### CIMAR CPCE60

A mid class plate compactor which is ideal for rental and contractors use.

**CPCE60 - CODE: CIMCPC-E60**

Model	CPC95	CPCE60
Engine Type	Honda GX160	Honda GX160
Weight (Kg)	95	65
Dimension L (mm)	1100	1080
W (mm)	500	400
H (mm)	830	800
Plate Size L (mm)	530	500
W (mm)	500	360
Vibration Frequency Hz(vpm)	100(6000)	100(6000)
Centrifugal Force kN(kgf)	15(1530)	0.5(1100)
Max.Traveling Speed m/min	25	25
Limited Gradient %	35	36



# Compaction

## BELLE

The Belle range of Forward Compaction Plates designed with Hand Arm Vibration levels in mind. Lightweight and Heavyweight machines are available depending on the type of material to compact as well as various engine options. The Altrad Belle plates are No.1 in the world for Hand Arm Vibration



**BELLE PCEL 320X HONDA  
PETROL FORWARD  
PLATE COMPACTOR**

**CODE: ELX3201**



**BELLE PCX13-40 HONDA  
PETROL FORWARD  
PLATE COMPACTOR**

**CODE: FC4000E**



**BELLE PCLX 12-40E  
110V ELECTRIC  
PLATE COMPACTOR**

**CODE: LCE4001**

Model	320X	PCX13-40	PCLX12-40E
Plate Width (mm)	320	400	380
Overall Plate Length (mm)	428	606	364
Plate Contact Length (mm)	364	-	-
Machine Height (mm)	515	-	-
Folded Handle Height (mm)	428	-	-
Engine Power (Hp)	3	4	2
Engine Power (kW)	2.2	3	1.5
Weight (kg)	49	87	50
Static Pressure (kg/m <sup>2</sup> )	425	542	388
Centrifugal Force (kN)	11	13	12
Travel Speed (m/min)	22	20	24
Vibration level (m/sec <sup>2</sup> )	4.43	3.2	3.97
Sound Power Level (dB(A))	105	-	-

\*\* Optional Water tank & wheel kits available for forward plates

# Compaction



## CIMAR CPC160

Heavy duty reversible plate compactor

**CODE: CIMCPC-160**

**CODE: CIMCPC-160Y**



## CR2 / CR3 REVERSIBLE PLATE COMPACTOR

**M0001**

**M0002**



## BELLE RPC 30/40 & 30/50 HATZ REVERSIBLE PLATE COMPACTORS

**30/40 - CODE: RPC3040**

**30/50 - CODE: RPC3050**

Model	CPC 160H	CPC 160Y	CR2	CR3	30/40D	30/50D
Engine Type	Honda GX200	Yanmar L70	Lombardini 15LD 225	Hatz 1 B 20	Hatz	Hatz
Max Power Output kW(ps)	-	-	3.5 (4.8)	3.4 (4.6)	3.1	3.1
Weight (Kg)	160	180	146	206	170	174
Dimension L (mm)	1130	1130	1215	1350	-	-
W (mm)	430	430	450	500	-	-
H (mm)	920	920	950	1060	-	-
Plate Size L (mm)	700	700	740	750	400	500
W (mm)	430	430	450	500	695	695
Vibration Frequency Hz(vpm)	90(5400)	90(5400)	100 (6000)	80 (4800)	95	95
Centrifugal Force kN(kgf)	27(2750)	27(2750)	25	34	30	30
Max.Traveling Speed (m/min)	25	25	15	20	-	-
Limited Gradient (%)	35	35	-	-	-	-



Integrated Wheel kit, ready for safe & east transport

Model	RPX 35/40DE Hatz 1B20	RPX 35/50DE Hatz 1B20
Part No.	1619.201	1619.204
Engine Power (Hp/kW)	4.2/3.1	4.2/3.1
Plate Size (mm)	400x700	500x700
Static Pressure (kg/m2)	1661	1350
Centrifugal Force (kN)	35	35
Frequency (Hz)	95	85
Maxx Gradient	20	20
Travel Speed (m/min)	27	26
Weight Class (kg)	160	200
Weight (kg)	211	216
Noise Level (dBA)	108	108

**RPX35 COMPACTOR**  
**CODE: RPX35**

Features:
- Robust design for long-life and use in the harshest site conditions
- Electric start with key ignition & LED warning lamps, eliminates need for operator training with manual starting
- IntegratedWheel Kit, ready for safe and easy transportation
- Control Handle & Additional Fixed Handle with strong locking :-
- More positive handling & control
- Better fulcrum for pulling machine onto its wheels
- Safe for operator moving without relying on moving contol handles
- No damage to the forward/reverse mechanism
- Angled baseplate for excellent gradability and travel speeds
- Low HAV handle, safe for operators to use for long periods
- High Compaction force for fast work and deep compaction
- Handle mounted throttle, perfect for the operator
- Compact high performance sealed for life lithium Ion battery. Dry battery = no liquid acid
- Specifically designed for hire and rental markets
- Paving pad option available.



# Compaction



## CIMAR CT66P TAPPING RAMMER

Medium weight Tapping Rammer with Honda engine

**CODE: CIMCT-66P-2A**



## SRV620 TAPPING RAMMER

**CODE: WBM0003B**

Model	CT66P	SRV620
Engine	Honda GX100	Honda GX100
Max Power Output kW(ps)	2.1(2.8)	2.1 (2.9)
Weight (Kg)	66	66
Dimension (mm) L	720	740
W	415	450
H	1045	1035
Plate Size (mm) L	300	330
W	280	280
Vibration Frequency Hz(vpm)	-	95
Centrifugal Force kN(kgf)	-	15
Max.Travelling Speed m/min	-	26
Jump Stroke (mm)	50-75	-
Max. Impact Force kN(kgf)	12.7(1300)	-
Impact Frequency (Num/min)	640-680	-
Fuel Tank Capacity (L)	2	-



RTX RANGE HEAVY DUTY TRENCH RAMMERS

A brand new range of 4 stroke Honda petrol engine and Yanmar Diesel Trench Rammers. The new RTX Rammers feature excellent balance for easy control and high level compaction.

Model	RTX50	RTX66	RTX74	RTX60	RTX68	RTX80D
A - Width (mm)	345	425	425	345	345	425
B - Length (mm)	670	700	700	705	705	700
C - Height (mm)	975	1065	1065	975	1040	1081
D - Ramming Shoe Width (mm)	230	280	280	165	280	280
E - Ramming Shoe Length (mm)	335	335	335	335	335	335
Maximum Output (kW)	2.3	2.6	2.6	2.3	2.3	3.5
Fuel Type	Unleaded	Unleaded	Unleaded	Unleaded	Unleaded	Diesel
Fuel Tank Capacity	2.5	2.5	2.5	2.3	2.5	2.5
Starting Mechanism	Recoil	Recoil	Recoil	Recoil	Recoil	Recoil
Operational Weight (Kg)	57.7	79	84	60	70	86
Vibration Frequency (Hz)	11	10	10	11	11	10
Impact Force (kN)	12.5	16.5	18.6	13.6	16	20.5
Blows Per Minute (bpm)	450 - 660	450-600	450-600	450-660	450-660	450-600
Stroke (mm)	52	52	52	52	52	52
Noise Level (dB(A))	108	108	108	108	108	108

CODE: RTX60H280S

# Concrete Cutting



### CIMAR CFC-18 FLOOR/ROAD SAW

Our CFC-18 CIMAR Saw is an agile & efficient manual-push Floor Saw. Features a low vibration handle. Ideal for small road repair jobs in concrete or asphalt. UP to 160mm cutting depth.

**CODE: CIMCFC-18**



### BELLE DUO 350X FLOOR SAW

Duo 350 Low HAV, Twin Blade 350mm Floor Saw ideal for trenching

**CODE: DSXA01**



### SIMA COBRA 45 FLOOR/ROAD SAW

Heavy duty capacity saw, yet very versatile and manoeuvrable. Supplied with a polypropylene 40 L. water tank. Cutting gauge for accurate cutting depth. The ergonomic design allows the handle to be used on medium and large sites whilst still guaranteeing top performance.

**CODE: SCM001**

Model	CFC18	Cobra45	350X
Engine Type	Honda	Honda	Honda
Engine Model	GX390QXC	GX390SNC	GX390
Engine Starter	Recoil	Recoil	Recoil
Fuel	Petrol	Petrol	Petrol
Wdth (mm)	520	620	618
Height (mm)	1060	930	1019
Length (mm)	1350	1580	870
Weight (kg)	110	108	120
Blade Diameter (mm)	450	500	350
Blade Bore Size (mm)	25.4	25.4	-
Max. Cutting Depth (mm)	160	120	120
Water Tank Capacity (L)	30	40	25
Cutting Width (mm)	-	-	100



# Concrete Cutting



## PREDATOR TS9 TILES AW

The TS9 is a wet tile saw for professional use. It uses continuous rim diamond blades. The unique water circulation design minimizes water loss and spillage while the water tray is easy to mount and refill. The dimensionally stable table allows accurate cutting and the parallel cutting guide with the angle guide plate allow precise guidance of the work piece.

**110V - CODE: DBP003**

**220V - CODE: DBP004**



## SIMA PERLA TILES AW

The Perla machines fulfill the four basic cutting functions carried out by professional stonemasons at building sites. Straight cutting at 90° angle. Mitre Cutting at 45° angle. Round drill holes. Polygonal inner boxes. With the Deluxe, The depth of cutting can be varied to enable the cutting of thick materials. Blade capacity of 300mm or 350mm. The cutting depth is 75mm with a 300mm blade and 110mm with a 350mm blade.

**PERLA 200 - CODE: SCM004B2**

**PERLA 250 - CODE: SCM005A**

Model	TS9	Perla 200	Perla 250
Motor Type	Single Phase AC Induction	Single Phase	Single Phase
Motor Power (kW)	800W	0.55	1.1
Voltage (V)	110/220	110V/220	110V/220
No Load/min-1	3000 (50Hz), 3600 (60Hz)	-	-
Max. Blade Diameter (mm)	230 (9")	200	250
Blade Bore (mm)	25.4 (1")	22.2	22.2
Bevel Capability	0-45 deg.	-	-
Max Cutting Length (mm)	-	640	620
Max. Cutting Depth-straight (mm)	48 (1-7/8")	40	63
Max. Cutting Depth- at 45 deg. (mm)	37(1-7/16")	-	-
Table Cutting Width -Left (mm)	305(12")	-	-
Table Cutting Width -Right (mm)	147(5-3/4")	-	-
Protection	IP44	-	-
Dimensions (mm)	660x595x320	930x460x417	930x560x467
Weight (kg)	14.71	26	40

# Concrete Cutting



## SIMA DAKAR MK45 TABLE SAW

A machine designed to suit every project. 90% of its components are stainless materials. To save time, the cutting length and depth can easily be adjusted to all materials with different dimensions.

**CODE: SCM011**



## SIMA VENUS 85 & 125 TABLE SAW

Designed to cut and mitre any kind of construction material, specially those with oversized dimensions, in a fast, clean and precise way. It is suitable not only building sites but also in masonry workshops cutting marble and granite, etc.

**VENUS 85 - CODE: SCM008A**

**VENUS 125 - CODE: SCM008**

Model	Dakar MK45	Venus 85	Venus 125
Motor Type	Single Phase/ ThreePhase	Single Phase /ThreePhase	Single Phase /ThreePhase
Motor Power (kW)	2.2/3	2.2/3	2.2/3
Voltage (V)	110V	110V	110V
Max. Blade Diameter	350	300/350	300/350
Blade Bore	25.4	25.4	25.4
Max Cutting Length (mm)	650	1250	1250
Max. Cutting Depth-straight (mm)	100	100/75	100/75
Dimensions (mm)	1214x808x1191	1450x780x1330	1850x780x1330
Weight (kg)	69.2	125	125

# Concrete Cutting



## MAXIPAVE BLOCK SPLITTER

A heavyweight block splitter for all common types of block paving. The specialist tools save the contractor's time when blocks have to be removed and reinstated

**CODE: CP00460**



## MINIPAVE BLOCK SPLITTER

A compact and lightweight block splitter designed for cutting standard 100mm x 200mm blocks. The Minipave is ideal for smaller jobs where its portability makes the operator's job quicker and easier.

**CODE: CP00460**



## WARRIOR WHEELBARROW

This barrow is a must for professional builders and ideal for use with the Belle Minimix 150. Suitable for the heaviest work. This 100ltr plastic tray is made of HDPE quality and therefore very durable. Comes with a 1 YEAR WARRANTY!

**CODE: CP00460**

Model	Minipave	Maxipave	Warrior
A - Length (mm)	659	1170	-
B - Width (mm)	140	315	-
C - Height (mm)	244	585	-
Max Cutting Length (mm)	250	400	-
Max Block Depth (mm)	87	125	-
Min Block Depth (mm)	47	-	-
Weight (kg)	18	35.5	17
Cutting Force (kN)	31.4	45.6	-
Cutting Force (kg)	3200	-	-
Tray Type	-	-	HDPE
Tray Capacity (L)	-	-	100



# Concrete Cutting

## STIHL Cut-off & Concrete Saws

Robust machines for demanding tasks: STIHL cut-off saws are specially designed for hard work on construction sites. The equipment has particularly long maintenance and servicing intervals and uncompromising reliability. Operating costs features include the outstanding cutting performance, standard long life filter system, sophisticated operating convenience and almost legendary easy servicing by STIHL. With the special STIHL accessories, such as the FW 20 cart, water tank or depth limiter, the powerful STIHL cut-off saws are optimally equipped for every job.



**STIHL TS410 12"  
CONCRETE CUTTING SAW**

**CODE: CP00460**



**STIHL TS420 14"  
CONCRETE CUTTING SAW**

**CODE: CP004601**



**STIHL TS800 16"  
CONCRETE CUTTING SAW**

**CODE: CP0048C**

Compact and robust, the STIHL TS 410 & TS 420 has a long-life filter system with cyclone pre-separation makes on site maintenance unnecessary. Extremely low vibration levels (3.9m/s²). High performance engine with stratified charge system. Compact design and optimised balance for excellent cutting and guide characteristics. For use with 300mm cutting wheel. ElastoStart, primer pump and decompression valve. Bayonet filler cap for tool free opening. Can be hand held or used with the FW 20 cart.

Very powerful 5.0 kW engine with 400 mm cutting wheel. Includes a long life air filter system with cyclone air routing. Ergonomic design with optimised handling positions. ElastoStart plus, compensator and decompression valve. Water attachment and composite cutting wheel come as standard. Can be operated by hand or mounted on a FW 20 cart.



**STIHL FW20 CART W/  
ATTACHMENT KIT**

The STIHL FW 20 cart turns all hand-operated STIHL cut-off saws into easily manoeuvrable cutting machines. Convenient depth adjustment allowing the cut-off saw to be easily mounted on the cart and cut height adjusted by means of the upper handle. Comes with 'Attachment kit with Quick Mounting System'. For the TS 400, TS 410, TS 420, TS 480i and TS 500i.

**410/420 - CODE: CP0046E**

**800 - CODE: CP0046E2**



**MESTO PRESSURISED WATER  
CONTAINER/DUST SUPPRESSOR**

This 10 litre capacity pressurised water container provides a mobile water supply and ensures clean, wet cutting without dust build up. No need for an external water connection. With recessed grip and stable base.

**CODE: MES3270W**



**STIHL TWO STROKE  
ENGINE OIL TUBE 100ML**

**CODE: MSS0011**

# Concrete Finishing



**PREDATOR 24" TROWEL**  
**CODE: PCE426**



**PREDATOR 36" TROWEL**  
**CODE: PCE436**



**24" & 36" POWER FLOAT  
BLADES**  
**24" - CODE: CPS0100C**  
**36" - CODE: CPS0100B**



**MBW F36/4  
POWER TROWEL**  
**CODE: CP0005**



**BELLE PRO TILT 900  
POWER TROWEL**  
**CODE: PTLW931**



**POWER FLOAT PAN**  
**24" - CODE: CPS0023**  
**36" - CODE: CPS0102A**

Model	24" Trowel	36" Trowel	MBW F36/4	PRO TILT 900
Engine	Honda GX160	Honda GX1605.5	Honda GX160	Honda GX160
Motor Power (Hp)	5.5	900	5.5	5.5
Trowelling Diameter (mm)	600	36"	900	900
Trowelling Diameter (inch)	24"	86	36"	36"
Weight (kg)	54		79	98.5

# Concrete Finishing



**ENAR HURACAN  
FINISHING  
SCREED**



**ENAR SPYDER  
HAND HELD HIGH  
FREQUENCY  
POKER SHAFT**



**ENAR AVMU HAND HELD  
ELECTRIC POKER**



**VGH5D  
POKER DRIVE UNIT**



**ENAR AFGH  
HIGH FREQUENCY PETROL  
POKER DRIVE UNIT**

Drive Unit	Stock Code	Description	Dimensions	Power	Weight Kg
Enar Huracan box	CP00187	Engine Unit Only		1.6hp	
	CP00089B	Box Beam - Profile 3 meter	3 Meter	-	22.5
	CP00089	Box Beam - Profile 4 meter	4 Meter	-	27
	CP00088	Box Beam - Profile 5 meter	5 Meter	-	33
• Also available with L shaped Beam					
Enar Huracan L	CP0087A	L Engine Unit only	-	1.6	12.2
	CP017	L Beam - Profile 2.5 meter	-	-	20
	CP0089B1	L Beam - Profile 3 meter	-	-	21.5
	CP0089L	L Beam - Profile 4 meter	-	-	24.7
Enar AVMU 115V	CP0010	Engine Unit Only 115V	150 x354x205	-	4.5
	CP0011AA	Engine Unit c/w 25mm shaft	4Mtr & Bottle (25mm x 300mm)	-	7
	CP0011	Engine Unit c/w 40mm shaft	4Mtr & Bottle (40mm x 335mm)	-	8.2
	CP0011A	Engine Unit c/w 48mm shaft	4Mtr & Bottle (48mm x 370mm)	-	9.4
Enar SPYDER 115V	CP0073G2	MB40 High Frequency 7m Poker Shaft 115V	7.4Mtr Shaft & Bottle (38X350mm)	580W	15
	CP0073G	MB51 High Frequency 7m Poker Shaft 115V	7.4Mtr Shaft & Bottle (50x 380mm)	850W	19
VGH5D	MAS011	Engine Unit Only VGH5D	-	-	21.5
	MAS006	Pendulum Type Shaft t/s VGH5D	-	-	-
AFGH Drive unit	CP0064	High Frequency Generator 5.5 HP Honda GX160 Petrol	-	-	36
AFDL Drive Unit	CP0072	High Frequency Generator Lombardini Diesel	-	-	48
• These shafts suit both AFGH & AFDL					
	CP0066	M38AFP 42V High Frequency	7 Mtr shaft & Bottle (38mm x 370 )		12
	CP0067	M5AFP 42V High Frequency	7 Mtr shaft & Bottle (50mm x 370 )		14
	CP0068	M7AFP 42V High Frequency	7 Mtr shaft & Bottle (65mm x 395 )		18



# Concrete Finishing



**PREDATOR BIG BLUE GLIDER  
BLADE 48"**



**PREDATOR ROUNDED END FRESNO  
36" TROWEL BLADE**



**PREDATOR ALUMINIUM BULL  
FLOAT BLADE 48"**



**KRAFT MULTI TRAC FRESNO  
CC874**



**PREDATOR TEXAS STYLE  
CONCRETE PLACER 18**



**PREDATOR OSCILLATING  
KNUCKLE**


Product Description	Stock Code
Predator Big Blue Glider Blade Only 48"	CP00103
Predator Big Blue Glider Blade Only 48" c/w Knuckle & 3 Snap lock Handles	PCEBGBLC
36" Snap lock Handle	PCE36SH
Predator Pitch Control Knuckle	PCEWDPC
Predator Rounded End FRESNO 36" Trowel Blade Only	PCE36SF
Predator Rounded End FRESNO 36" Trowel Blade c/w Knuckle, 3 Snap lock handles & Brush Kit	PCE36FR
Brush kit t/s 36" Fresno	PCE36BS
36" Snap lock Handle	PCE36SH
Predator Pitch Control Knuckle	PCEWDPC
Predator Aluminium Bull Float Blade Only 48"	PCE48BF
Predator Aluminium Bull Float Blade Only 48" c/w Knuckle, 3 Snap lock handles & Brush Kit	PCE48AL
Brush kit t/s 48" Aluminium	PCE48BS
36" Snap lock Handle	PCE36SH
Predator Pitch Control Knuckle	PCEWDPC
Kraft Multi Trac Trowel 36" CC874 ONLY	CP880
Predator Texas style Concrete Placer 18"	PCE18TP
36" Snap lock Handle	PCE36SH
Predator Pitch Control Knuckle	PCEWDPC

# Concrete Finishing



### KRAFT ROLLER TAMP

18" - CODE: CP0063B  
36" - CODE: CP0063C  
48" - CODE: CP0063A

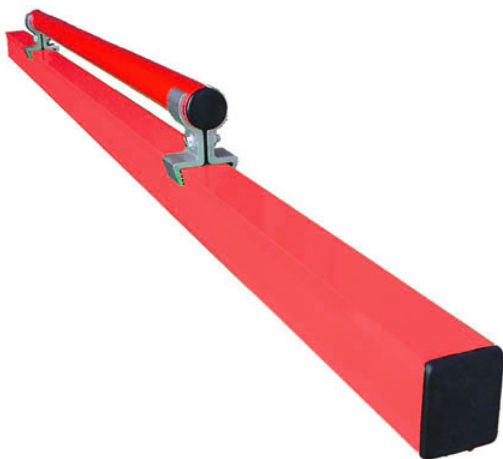

### PREDATOR AUSSIE SCREED

2.4MTR - CODE: PREAS24  
3MTR - CODE: PREAS3  
3.6MTR - CODE: PREAS36  
4.2MTR - CODE: PREAS42



### CES 200

Concrete grinder / scarifier with 8" drum width.

Engine Type	Honda GX160
Max. Output Power kW(PS)	4(5.5)
Weight (Kg)	60
Dimension L (mm)	890
W (mm)	360
H (mm)	920

CODE: CIMCES-200

# Concrete Finishing



## COMMODORE SITE MIXER

A heavy-duty site mixer designed for prolonged site and rental use. Built to withstand the toughest conditions. The Commodore range is ideal for mixing larger batches of concrete and mortar.

**CODE: MIXL48**

**SPARE DRUM ONLY T/S BELLE  
MINIMIX 150 - CODE: CPS30170**

**STAND ONLY T/S BELLE MINIMIX  
150 - CODE: CPS0684**



## BELLE MINIMIX 150 ELECTRIC CEMENT MIXER

Compact tip up professional mixer. A range of mixers for the professional and rental users. Built for site durability, these are quality, portable mixers for all small to medium building projects. The number one choice for mixers worldwide.

**BELLE MINIMIX 150 HONDA M54 CEMENT MIXER  
CODE: CP0009**

**BELLE MINIMIX 150 ELECTRIC CEMENT MIXER 110V  
CODE: CP0008**

**BELLE MINIMIX 150 ELECTRIC CEMENT MIXER 220V  
CODE: CP0007**

Model	Commodore 10-7	Honda M54 Minimix 150	M12 Minimix 150 110v	M16 Minimix 150 220v
Engine Type	Yanmar L40	Petrol	Electric	Electric
Engine Power (Hp/kW)	3	4.0/2.9	0.75/0.55	0.75/0.55
Max. Drum Capacity (Ltr)	310	130	130	130
Max. Mixing Capacity (Ltr)	220	90	90	90
Drum Speed (mm)	19	24	24	24
Width (kg)	900	597	597	597
Height (kg)	1430	890	890	890
Length(kg)	1850	1211	1211	1211
Weight(kg)	438	61	55.5	55.5



# Concrete Finishing



**ALTRAD SAINT DENIS AT350 ROAD TOW MIXER**

A rugged mixer designed for site to site portability with a quick and easy set-up and with the latest approved towing system and tail lights. With a strong, durable and compact fast tow chassis for demanding on-site conditions, this new mixer is destined to be a firm favourite with contractors and hire companies alike as it takes up minimal storage space and is quick and effortless to transfer from road tow to mixer mode.

**CODE: AT350**



**ATIKA COMPACT 100 PAN MIXER 110V**

The ideal mixer for painters, floor and tile layers and plasterers. It guarantees high productivity, the best mixing results and offers extraordinary manoeuvrability on site.

**CODE: CPM01**

Model	AT350	Compact 100
Engine	UK 350 PRO HONDA GX160QX	-
Power (hp/kW)	5.5 / 4	2.68 / 2
Drum Volume (L)	340	100
Mixing Maximum (L)	280	80
Paddle Type	Gated Paddles	-
Dimensions (WxHxL)	1910x1630x950	690x1190x720
Pneumatic Tyres (mm)	500	-
Noise Level (dB(A))	105	-
Weight (Kg)	323	80



**BELLE CLEAN CONCRETE DISSOLVER**

**1L - CODE: CPS0692**  
**19L DRUM - CODE: CPS0698**

# Mini Dumpers



## BMD 300 MINI DUMPER

The BMD motorized pedestrian 4-wheel drive Mini dumper is designed for loading and transporting with speed, greater flexibility and manoeuvrability . It can accommodate all kind of loads, on any terrain, for various applications in construction as well as in landscaping and agricultural work.

### CODE: BMD01

#### Features:

- Strong heavy duty design & tipping mechanism to handle loads of up to 300kg
- Climbing ability up to 20 degree inclines
- 4 wheel drive mode and removable centre wheel for service
- Ideal for small spaces and can pass through doorways
- Easy to manoeuvre when turning or on slopes
- Gearbox with 4 forward gears, reverse gear
- 4 x Multipurpose tyres & disc brakes
- Faster, more flexible than track driven dumper
- User and service friendly to maximise productivity
- Engine position allows easy access & service
- Centre wheel engaging 4 wheel drive whe loaded on rough terrain
- The lower position of the skip permits fast tipping with no strain or operator fatigue
- Perfectly balanced when working with full load
- Additional bearings to support axle and strengthening plate.
- Bottom protection plate to avoid damage by stones

Model	BMD300
Part No.	BMD01
Engine model (Honda)	GXV160
Motor Power (Hp/kW)	5.5/4
Max Travel Speed Forward (km/h)	6
Max Travel Speed Reverse (km/h)	2.6
Skip Capacity Level Filled (Ltr)	113
Skip Capacity Heaped Volume (Ltr)	134
Maximum Uphill Gradient (°)	20°
Maximum Downhill Gradient (°)	20°
Maximum Payload (kg)	300
Machine Weight (kg)	155
Tyre Pressure (bar)	2.1
Friction Wheel Pressure (bar)	2.4
Machine Width (mm)	716
Machine Length (mm)	1609
Machine Length (Tipping) (mm)	1957
Machine Height (mm)	934
Machine Height (Tipping) (mm)	977
Wheel Base (mm)	541
Noise Level (dB(A))	101

# Mini Dumpers



## TRUXTA BENDI

With the TRUXTA petrol, diesel and electric you get a smooth operation with squeeze & go hydrostatic system.

TRUXTA mini dumpers - built for durability - hydrostatic system - no slipping belts - sealed for life and maintenance free. The TRUXTA - 2 stage self-tipping skip requires no manual lifting. The ultimate Skip Tip Angle equals no leftovers, just a Totally Empty Skip.

The TRUXTA electric has a regenerative-braking system to help the slow down when stopping; this generates power into battery pack, to increase efficiency and range.

### CODE: B450G

Model	TB 450G
Engine	Honda GX 200
Fuel Type	Unleaded Petrol
Fuel Capacity (L)	8.1
Max Payload (Kg)	450
Unladen Weight (Kg)	180
Working Gradient	25degrees
Drive & Controls	Hydrostatic System
Brake System	Fail safe dead-man handle
Standard Fitment Tyres	Flotation with option
Travel Speed (mph)	0-4 0-1.5
Noise Level dB(A)	<94
Hand arm vibration (m/s <sup>2</sup> )	4.5

TRUXTA powered mini dumpers provide maximum versatility and light touch operation, available with battery power, petrol or diesel. The new BENDie 4x4 mini dumper provides access even in the tightest corners. At just 730mm (850mm) wide the TRUXTA 4x4 is really compact and gets into places other units can't. A BENDie mini dumper's articulated chassis means the TRUXTA handles corners with minimum effort - just steer around bends and corners - no need to lift or reposition. With a massive skip capacity the TRUXTA BENDie mini dumper offers excellent load capacity in and around sites and gardens. The well balanced robust unit fits through typical doorways (2ft 6" B300 or 3ft B450). Easily transportable from site to site, and compact enough to store.

In Operation - The key factor is that operators don't have to rely on physical strength or brute force with the BENDie's easy steer handling. The squeeze & go controls (no mechanical gearboxes) make for the easiest use for any operator, weak or strong. A fail-safe dead-man braking system keeps the operator safe at all times. Even when tipping the 2 stage self-tip provides optimum balance even with a full load.

TRUXTA has easy fit attachments for a variety of applications. The new TRUXTA Flatbed, folds down and tips up. The towball attachment offers different positions for different sizes of trailer.

# Dehumidifiers

We offer a variety of dehumidifiers and air movers to remove water and assist with drying areas after water damage. Following a flood, whether it is in your basement or office, it's vitally important to restore the damaged area to good order as soon as possible to protect your health from microorganisms, mold and bacteria that may grow and ultimately prevent further damage.



**KHOL 16L COMPACT  
DOMESTIC DEHUMIDIFIER**  
**CODE: DEPT003**



**EBAC BD70  
INDUSTRIAL DEHUMIDIFIER**  
**CODE: DEPT002**



**DRIEAZ BD1000  
INDUSTRIAL DEHUMIDIFIER**  
**CODE: F435-DV**



**EBAC BD150  
INDUSTRIAL DEHUMIDIFIER**  
**CODE: DEPT001**



**DRIZAIR BD1200  
INDUSTRIAL DEHUMIDIFIER**  
**110V - CODE: F203-A UK**

Model	Khol 16	EBAC BD70	DriEaz BD1000	EBAC BD150	DriEaz BD1200
Typical Extraction (L/d)	16	12	25	30	28
Voltage (V)	220	110/230	110/230	110/230	230
Current (A)	-	4/2	3.3/6.5	16/8	3
Power (kW)	-	0.46	-	1.5	-
Dimensions (HxWxDmm)	305x432x254	508x305x305	850x500x510	915x610x692	830x500x500
Hour kwh Counter	-	-	Yes	-	No
Water pump out	-	-	Automatic	-	Automatic
Operating range	-	3-35	1-38	3-35	1-38
Operating Temp (min & max)	5	3 & 35	1 & 38	3 & 35	1 & 38
Weight (Kg)	13.5	25	39	35	36



# Dehumidifiers



**EBAC CD425**  
**CODE: DEPT004A**



**EBAC CD110**  
**CODE: DEPT004B**

Model	CD110	CD425
Typical Extraction (L/d)	30	150
Voltage (V)	230	415
Current (A)	8	16
Power (kW)	1.5	6
Dimensions (HxWxDmm)	400x1130x500	1190x1100x460
Hour kwh Counter	-	-
Water pump out	-	-
Operating range	3-35	3-35
Operating Temp (min & max)	3 & 35	3 & 35
Weight	75	160



We recommend using this tool in conjunction with Carpet cleaning and dehumidifying as it can significantly reduce drying time.

**VELO PRO AIR MOVER 230V.**  
**CODE: F505-230V UK**



**DRI POD FLOOR DRYER**  
**CODE: F451230**



**PREDATOR 3 SPEED INDUSTRIAL FLOOR DRYER**  
**CODE: DVAC019**

Model	Velo Airmover	DriPod	Predator Floor Dryer
Power (A)	0.53	0.5	-
Weight (Kg)	-	4.8	16
Speeds	1-speed	1-speed	3-speed
Voltage (V)	230	230	230
Size H x W x D (cm)	22.9 x 45.7 x 58.4	-	-
Cable Length (m)	-	-	6



DISCUT PREMIUM DIAMOND BLADE

Available in concrete or asphalt type from 4.5" – 18"



DISCUT SPECIALIST  
TILE CUTTING BLADE

Standard continuous blade from 4.5" – 12"



DISCUT TURBO DIAMOND BLADE

Suitable for cutting granite & hard tiles.  
Available in 7" – 12"



DISCUT PORCELAIN TILE  
CUTTING BLADE

Available in 4.5"

DISCUT PROFESSIONAL DIAMOND BLADES

Code	Size	Description
DSC001	4.5"	PREMIUM CONCRETE
DSC001A	5"	PREMIUM CONCRETE
DSC002	9"	PREMIUM CONCRETE
DSC003	12"	PREMIUM CONCRETE
DSC004	14"	PREMIUM CONCRETE 20MM BORE (T/S CONSAW)
DSC004A	14"	PREMIUM CONCRETE 1" BORE
DSC004B	16"	PREMIUM CONCRETE 1" BORE
DSC005	18"	PREMIUM CONCRETE 1" BORE
DSC003B	12"	PREMIUM ASPHALT 20MM BORE
DSC004A1	14"	PREMIUM ASPHALT 1" BORE
DSC004B1	16"	PREMIUM ASPHALT
DSC005A	18"	PREMIUM ASPHALT
DSC006A1	4.5"	PORCELAIN CUTTING BLADE
DSC0070	7"	TURBO DIAMOND BLADE
DSC0071	9"	TURBO DIAMOND BLADE
DSC0072	12"	TURBO DIAMOND BLADE
DSC0061	6"	FAST CUT CONTINUOUS RIM
DSC006A	7"	FAST CUT CONTINUOUS RIM
DSC007	9"	FAST CUT CONTINUOUS RIM
DSC084	9"	PREMIUM GRANITE DIAMOND BLADE
DSC085	12"	PREMIUM GRANITE DIAMOND BLADE
DSC086	14"	PREMIUM GRANITE DIAMOND BLADE
DSC0010	4.5"	PREMIUM CUPWHEEL
DSC0011	5"	PREMIUM CUPWHEEL
DSC0012	7"	PREMIUM CUPWHEEL



PROFESSIONAL DIAMOND BLADE

Available in concrete or asphalt type from 12" – 20"

# Accessories

## DIAMOND CORE BITS

Predator concrete core drills make short work of drilling even heavily reinforced concrete. The special rooftop design makes starting the drilling process easy.

Code	Description	Size	Connection
PDC112150	PREDATOR DRY DIAMOND CORE	112 X 150MM	1/2"BSP F
PDC117150	PREDATOR DRY DIAMOND CORE	117 X 150MM	1/2"BSP F
PDC127150	PREDATOR DRY DIAMOND CORE	127 X 150MM	1/2"BSP F
PDC150150	PREDATOR DRY DIAMOND CORE	150 X 150MM	1/2"BSP F
PDC52150	PREDATOR DRY DIAMOND CORE	52 X 150MM	1/2"BSP F
PDCDRYCOREKIT	PREDATOR DRY CORE KIT COMPLETE 9PCE	5 x Sizes	1/2"BSP F
PDC18300	PREDATOR WET DIAMOND CORE	18MM X 300MM	1/2"BSP M
PDC20300	PREDATOR WET DIAMOND CORE	20MM X 300MM	1/2"BSP M
PDC22300	PREDATOR WET DIAMOND CORE	22MM X 300MM	1/2"BSP M
PDC24300	PREDATOR WET DIAMOND CORE	24MM X 300MM	1/2"BSP M
PDC26300	PREDATOR WET DIAMOND CORE	26MM X 300MM	1/2"BSP M
PDC28300	PREDATOR WET DIAMOND CORE	28MM X 300MM	1/2"BSP M
PDC30300	PREDATOR WET DIAMOND CORE	30MM X 300MM	1/2"BSP M
PDC32300	PREDATOR WET DIAMOND CORE	32MM X 300MM	1/2"BSP M
PDC34300	PREDATOR WET DIAMOND CORE	34MM X 300MM	1/2"BSP M
PDC36300	PREDATOR WET DIAMOND CORE	36MM X 300MM	1/2"BSP M
PDC38300	PREDATOR WET DIAMOND CORE	38MM X 300MM	1/2"BSP M
PDC40300	PREDATOR WET DIAMOND CORE	40MM X 300MM	1/2"BSP M
PDC42300	PREDATOR WET DIAMOND CORE	42MM X 300MM	1/2"BSP M
PDC44300	PREDATOR WET DIAMOND CORE	44MM X 300MM	1/2"BSP M
PDC46300	PREDATOR WET DIAMOND CORE	46MM X 300MM	1/2"BSP M
PDC48300	PREDATOR WET DIAMOND CORE	48MM X 300MM	1/2"BSP M
PDC50300	PREDATOR WET DIAMOND CORE	50MM X 300MM	1/2"BSP M
PDC52300	PREDATOR WET DIAMOND CORE	52MM X 300MM	1/2"BSP M
PDC52450	PREDATOR WET DIAMOND CORE	52MM X 450MM	1 1/4"UNC F
PDC65450	PREDATOR WET DIAMOND CORE	65MM X 450MM	1 1/4"UNC F
PDC78450	PREDATOR WET DIAMOND CORE	78MM X 450MM	1 1/4"UNC F
PDC102450	PREDATOR WET DIAMOND CORE	102 X 450MM	1 1/4"UNC F
PDC107450	PREDATOR WET DIAMOND CORE	107 X 450MM	1 1/4"UNC F
PDC117450	PREDATOR WET DIAMOND CORE	117 X 450MM	1 1/4"UNC F
PDC127450	PREDATOR WET DIAMOND CORE	127 X 450MM	1 1/4"UNC F
PDC132450	PREDATOR WET DIAMOND CORE	132 X 450MM	1 1/4"UNC F
PDC142450	PREDATOR WET DIAMOND CORE	142 X 450MM	1 1/4"UNC F
PDC152450	PREDATOR WET DIAMOND CORE	152 X 450MM	1 1/4"UNC F
PDC162450	PREDATOR WET DIAMOND CORE	162 X 450MM	1 1/4"UNC F
PDC178450	PREDATOR WET DIAMOND CORE	178 X 450MM	1 1/4"UNC F
PDC200450	PREDATOR WET DIAMOND CORE	200 X 450MM	1 1/4"UNC F
PDC225450	PREDATOR WET DIAMOND CORE	225 X 450MM	1 1/4"UNC F
PDC250450	PREDATOR WET DIAMOND CORE	250 X 450MM	1 1/4"UNC F
PDC300450	PREDATOR WET DIAMOND CORE	300 X 450MM	1 1/4"UNC F
PDC350450	PREDATOR WET DIAMOND CORE	350 X 450MM	1 1/4"UNC F



Adaptors			
Code	Description	Size	Connection
PDCM1812	PREDATOR ADAPTOR - M18 FEM TO 1/2"BSP M	115MM	-
PDCM18-1/2"BSPADAPT2	PREDATOR ADAPTOR - M18 FEM TO 1/2"BSP M	200MM	-
PDC11/4"-1/2"ADAPT	PREDATOR ADAPTOR UNC BSP	115MM	11/4" TO 1/2"
PDC11/4"FEM-11/4"MALE ADAPT	PREDATOR ADAPTOR FEMALE TO MALE LO	300MM	1 1/4"UNC

## SDS DRILL BITS



### MILWAUKEE SDS MAX CONCRETE DRILL BITS

Part Number	Diameter x overall length mm	Part Number	Diameter x overall length mm	Part Number	Diameter x overall
4932307067	5x110 -1pc	4932399327	8x600 -1pc	4932344300	15x260 -1pc
4932399315	5x160 -1pc	4932399328	8x1000 -1pc	4932307080	16x160 -1pc
4932399316	5x210 -1pc	4932353823	9x160 -1pc	4932307081	16x210 -1pc
4932339499	5.5x110 -1pc	4932353822	9x210 -1pc	4932399331	16x260 -1pc
4932340408	5.5x160 -1pc	4932340410	10x110 -1pc	4932344301	16x310 -1pc
4932399317	5.5x210 -1pc	4932307073	10x160 -1pc	4932307082	16x450 -1pc
4932399318	5.5x260 -1pc	4932307074	10x210 -1pc	4932367069	16x600 -1pc
4932399319	5.5x310 -1pc	4932344295	10x260 -1pc	4932367021	16x1000 -1pc
4932399320	5.5x410 -1pc	4932353824	10x310 -1pc	4932344303	18x200 -1pc
4932307068	6x110 -1pc	4932344296	10x450 -1pc	4932307083	18x250 -1pc
4932307069	6x160 -1pc	4932367014	10x600 -1pc	4932344304	18x300 -1pc
4932373136	6x210 -1pc	4932367015	10x1000 -1pc	4932340411	18x450 -1pc
4932353819	6x260 -1pc	4932367066	11x160 -1pc	4932367022	18x600 -1pc
4932399321	6x310 -1pc	4932399329	11x260 -1pc	4932367024	18x1000 -1pc
4932399322	6x460 -1pc	4932307075	12x160 -1pc	4932344305	20x200 -1pc
4932344292	6.5x110 -1pc	4932307076	12x210 -1pc	4932307084	20x250 -1pc
4932344293	6.5x160 -1pc	4932344297	12x260 -1pc	4932399027	20x300 -1pc
4932399147	6.5x210 -1pc	4932353825	12x310 -1pc	4932307085	20x450 -1pc
4932399148	6.5x260 -1pc	4932307077	12x450 -1pc	4932367025	20x600 -1pc
4932399323	6.5x310 -1pc	4932367068	12x600 -1pc	4932367026	20x1000 -1pc
4932353820	7x110 -1pc	4932367017	12x1000 -1pc	4932373911	22x250 -1pc
4932340409	7x160 -1pc	4932307946	13x160 -1pc	4932344307	22x450 -1pc
4932399222	7x210 -1pc	4932344298	13x260 -1pc	4932367027	22x600 -1pc
4932399324	7x250 -1pc	4932307078	14x160 -1pc	4932367029	22x1000 -1pc
4932307070	8x110 -1pc	4932353826	14x210 -1pc	4932373922	24x250 -1pc
4932307071	8x160 -1pc	4932307079	14x260 -1pc	4932307087	24x450 -1pc
4932307072	8x210 -1pc	4932399330	14x310 -1pc	4932344308	25x250 -1pc
4932353821	8x260 -1pc	4932307088	14x450 -1pc	4932344309	25x450 -1pc
4932399325	8x310 -1pc	4932367018	14x600 -1pc	4932367030	25x1000 -1pc
4932399326	8x400 -1pc	4932367019	14x1000 -1pc	4932344310	26x250 -1pc
4932367013	8x460 -1pc	4932373910	15x160 -1pc	4932344311	26x450 -1pc



## MILWAUKEE SDS PLUS CONCRETE DRILL BITS



Part Number	Diameter x overall length mm
4932352750	12x340
4932352751	12x540
4932430727	12x690
4932352752	14x340
4932352753	14x540
4932352754	15x340
4932352755	15x540
4932352756	16x340
4932352757	16x540
4932352758	16x940
4932352759	16x1320
4932352760	18x340
4932352761	18x540
4932352762	18x940
4932352763	18x1320
4932352764	20x320
4932352765	20x520
4932352766	20x920

Part Number	Diameter x overall length mm	Part Number	Diameter x overall length mm
4932352767	20x1320	4932352784	30x570
4932352768	22x320	4932430729	30x920
4932352769	22x520	4932352785	32x370
4932352770	22x920	4932352786	32x570
4932352771	22x1320	4932352787	32x920
4932352772	24x320	4932352788	32x1320
4932352773	24x520	4932352789	35x370
4932352774	25x320	4932352790	35x570
4932352775	25x520	4932352791	35x920
4932352776	25x920	4932352792	38x370
4932352777	25x1320	4932352793	38x570
4932430728	26x520	4932352794	40x370
4932352778	28x370	4932352795	40x570
4932352779	28x570	4932352796	40x920
4932352780	28x670	4932352797	40x1320
4932352781	28x920	4932352798	45x570
4932352782	28x1320		
4932352783	30x370		

## SDS MAX, BREAKTHROUGH & CORE BITS

Daly Industrial supply a large range of High quality, fast drilling, long life, bits. Manufactured in Germany. Ideal for installing external cables & piping etc. into concrete, masonry & Limestone. Ideal for use in the Hire Industry.



### SDS MAX TUNGSTEN CORE BITS

Diameter mm	Total Length mm	Stock Code
55	150	CB069
82	150	CB070
100	150	CB072
115	150	CB072A
125	150	CB073
150	150	CB0731
<b>Adapters, Extensions, Shanks</b>		
Total Length mm		Stock Code
200	SDS MAX	CB075
460	SDS MAX	CB076
PILOT PIN	11 X135	CB077

100 x 150 Core	Includes Pilot bit & SDS Max 460 mm Adaptor	CB016
115 x 150 Core	Includes Pilot bit & SDS Max 460 mm Adaptor	CB017
125 x 150 Core	Includes Pilot bit & SDS Max 460 mm Adaptor	CB018
150 x 150 Core	Includes Pilot bit & SDS Max 460 mm Adaptor	CB019



### SDS MAX BREAKTHROUGH BITS

Diameter mm	Working length mm	Total Length mm	Stock Code
45	450	590	CB050
45	850	990	CB051
55	450	590	CB052
55	850	990	CB053
65	450	590	CB054
65	850	990	CB055
80	450	590	CB056
80	850	990	CB057



### SDS-MAX CHISELS

Length mm		Stock Code
400	SDS Max Point	RSP4931343735
400	SDS Max Chisel	MIL4932343738
400 X 50	SDS MAX 2" Spade	AEG4932343743
300 x 75	SDS MAX 3" Spade	AEG4932343744
300 X 26	SDS MAX 1" Gouge Chisel	EA093

### 21MM K-HEX RANGE (KANGO 900 TYPE)

380 x 25mm – 1" Chisel	EA043
300 x 50 mm	EA044A
300 X 75MM	EA044B
380 Pointed	EA044
300 X 25MM – 1" Gouge	EA049

# Accessories

## TRADE QUALITY TCT BLADES

Daly Industrial Supply offer a range of quality PREDATOR TCT blades from 7 1/4" – 12" in a variety of tooth formations. Suitable for circular, bench & chop saws.

If you are looking for a specific blade not listed below please contact your Rep with required Specification & we will source it for you.

Code	Description
DSC0050	7 1/4" 24 TOOTH TRADE QUALITY
DSC0051	7 1/4" 40 TOOTH TRADE QUALITY
DSC052	9 1/4" 30 TOOTH TRADE QUALITY
DSC0521	9 1/4" 60 TOOTH TRADE QUALITY
DSC054	10" 60 TOOTH TRADE CHOP SAW BLADE
DSC053	10" 30 TOOTH TRADE QUALITY
DSC055	12" 30 TOOTH TRADE QUALITY
DSC056	12" 60 TOOTH TRADE CHOP SAW BLADE
DSC052A	9" 30 (230MM) TOOTH TRADE QUALITY BLADE (HILTI TYPE)
DSC051A	216MM X 48 TOOTH TRADE CHOPSAW BLADE
DSC051B	216MM X 60 TOOTH TRADE CHOPSAW BLADE



## TIMBER CUTTING ACCESSORIES

We have an extensive range of Timber cutting Accessories. Wood Augers, 7pce Contractors Set, Flat wood bits, Hole saws, Sabre Saw blades & much more.



## HANDLING EQUIPMENT



### PREDATOR PALLET TRUCK

Features:

- Most standard and popular model with capacity 2500kgs.
- Complete pump design with reliable leak-proof pump eliminating maintenance and extending the service time.
- 210 steering arc and small turning radius.
- Fork lowering speed is controllable, operated by hand control and foot pedal.
- Ergonomic rubber wrapped handle, which is comfortable and convenient to operate.
- Entry/Exit Roller, more freely travel.
- Equipped with over-load valve with long service time.
- Ergonomic Large Rubber handle with three control lever.
- Size: Fork W x Fork L – 540 x 1150

**CODE: DPT001**





# Floor Finishing Equipment



## SCORPION RENT DRUM SANDER

The Scorpion Sander is chosen by many of the main Rental companies throughout Europe as the go to Hire Sanding Machine. It is has proven quality & reliability, manufactured in Italy.

**CODE: IS001**



**KÜNZLE & TASIN**

## PLANFIX PRO55 ORBITAL SANDER

The Planfix Pro55 Orbital Sander is the ideal machine for finishing & varnish removal jobs on wooden floors. This machine is suitable for both professional floor contractors & DIY users. A powerful motor of 1100 watts together with an 800 watt motor on the 15Lt Vacuum unit gives excellent results on the floor.

**CODE: IS005**

## VEGA 7" EDGING SANDER


The VEGA is very popular in the rental market, it is the most suitable professional edger to achieve top quality results when you have to work on stairs and in narrow areas. Equipped with a powerful 1250 watt motor. This last one has the new OMNICASTER casters that increase the handiness of the edger during the job. Standard fabric dust bag, disposable paper bags or remote vacuum systems can be used, at your convenience. Kit available for Velcro backing disc on demand.

**CODE: IS004**

Model	Scorpion Rent	Planfix Pro55	Vega 7"
Power (W)	1500	1100 & 800	1250
Speed (rpm)	2.500	1.400	3.000 (50Hz) 3200 (60Hz)
Weight (Kg)	45	55	55
Drum (mm)	200 x Ø 147	-	-
Abrasive (mm)	200 x Ø 470	300 x Ø 460	Ø 178
Sanding Pad (mm)	-	300 X Ø 460	-
Backing Disc (mm)	-	-	Ø 175

# Floor Finishing Equipment

## SANDPAPER & NAILER

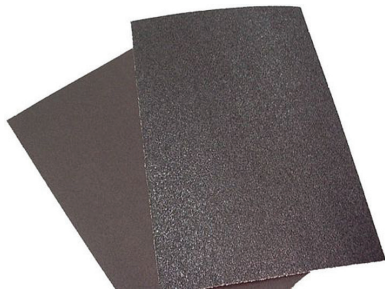

GRIT G24: SS047A  
GRIT G36: SS047  
GRIT G60: SS049  
GRIT G80: SS050  
GRIT G100: SS051  
GRIT G120: SS051A

**SQUARE BUFF SAND PAPER**  
**12" X 18" SHEETS**



GRIT G24: SS223  
GRIT G36: SS224  
GRIT G60: SS257  
GRIT G80: SS226  
GRIT G100: SS227  
GRIT G120: SS228

**NOTCHED SHEETS**



**BACK PADS**

**SS003**



**7 INCH SANDING DISC -**  
**ALUMINIUM OXIDE DISCS**

GRIT G24: SS053  
GRIT G36: SS054  
GRIT G60: SS059  
GRIT G80: SS059A  
GRIT G100: SS059B  
GRIT G120: SS059C



**8" WIDE X 50M ROLL**

GRIT G40: SS199  
GRIT G80: SS221  
GRIT G100: SS221A  
GRIT G120: SS222



**PORTA NAILER**  
**SPT0001**



**PORTA NAILS 1.5" (PER 1000)**  
**NAILS 1.5" (PER 1000): SPT0002A**  
**NAILS 2" (PER 1000): SPT0002**



## LONCIN 75CM TILLER

For fantastic value, rugged performance and versatility from the large garden to the Contractor and the Hire Shop, the Loncin tiller is the ideal machine. Powered by a high specification Loncin engine and complete with transport wheels & reverse transmission combined with the Heavy duty Rotors as standard make light work of a difficult job.

Rated power	3.4 kw	Working capacity	0.1/0.3 m/s
Rated speed	3600 r/min	Efficiency per hour	≥400m <sup>2</sup> /h
Displacement	196CC	Transmission	Chain
Gas oil capacity	3.6L	Connecting	Straight
Oil capacity	0.6L	Rated blade speed	120r/min
Fuel consumption	≤30 kg /hm <sup>2</sup>	Blade Type	Dryland blade
Cutting width	75 cm	Dimension	1500×850×1000 mm
Cutting depth	≥10 cm	Net weight	62.5kg

**CODE: DPT1070**



## CAMON LS14 LAWN SCARIFIER

The CAMON Lawn Scarifiers will efficiently rid your lawn of unwanted moss and thatch. Easy to use and very effective

**CODE: LS14**



## CAMON LS42 LAWN SCARIFIER

**CODE: CLS42**

Model	LS14	LS42
Engine	Honda GP160 Petrol	Honda GX160 Petrol
Power (hp)	4.8	4.8
Working Width (mm)	420	420
Cartridge	Fixed Blades (15)	Free swinging blades (30)
Weight (Kg)	40	63
Dimensions (LxWxH)cm	95x60x102	120x67x98



# Gardening Care Equipment



### TC07 TURF CUTTER

The CAMON TC07 Turf Cutter is a gearbox driven turf cutter that simply cuts an even strip of turf

**CODE: TC07**



### SG30 STUMP GRINDER

The CAMON SG30 Stump Grinder is a compact machine that will remove unwanted tree stumps simply, safely and efficiently, it has been designed and manufactured by us here in Sussex.

**CODE: CSG30**



### CAMON LA25 LAWN AERATOR

This Lawn Aerator can be fitted with either solid spikes or hollow corers (comes with both as standard); allowing you maximum flexibility in rejuvenating your lawn.

**CODE: CLA25**

Model	SG30	TC07	LA25
Engine	Honda GX390 Banks petrol 11.7hp	Engine Honda GX160 petrol 4.8hp	Honda GX160 petrol 4.8hp
Working Width(mm)	-	300 (12")	380(15")
Cutting Depth(mm)	330 (13") below ground	10 to 35 (1/2" to 1 1/2")	-
Drive	-	Positive gear drive	-
Weight (kg)	135	93	100
L x W x H (cm)	190 x 63 x 126	170 x 67 x 97	100 x 64 x 68
Teeth	Teeth 8 Greenteeth®	-	-
Cutting Height(mm)	560 (22") above ground	-	-
Aeration Depth	-	-	75mm (3")
Spike Dimensions	-	-	10mm (1/3") outer diameter
Corer Dimensions	-	-	19mm (3/4") outer diameter 15mm (1/2") inner diameter



# General Purpose Engines

## LONCIN ENGINES



The innovative range of Loncin engines are used by original equipment manufacturers around the world. The range offers applications for the professional user in the plant hire, construction and ground care markets, and, in addition for the homeowner and DIY enthusiast looking for quality products at a competitive price



**LONCIN G120FQ**  
**CODE: DPT1040A (3/4")**



**LONCIN G210FQ**  
**CODE: DPT1041A (3/4" Q)**  
**CODE: DPT1041C (20MM STRAIGHT SHAFT)**  
**CODE: DPT1041D (TAPER SHAFT)**



**LONCIN LC152F PETROL**  
**CODE: DPT1040 (5/8")**

Model	LC152	G120	G210
Engine Type	Single cylinder, 4-stroke, forced air cooled	Single cylinder, 4-stroke, OHV, forced air cooling	Single cylinder, 4 stroke forced cooling OHV
Displacement (cc)	97	118	212
Net Power	1.8 / 1.35 @ 3600	3.5 / 2.6 @ 3600	4.4KW/3600
Net torque (rpm)	3.3 @ 3000	7.3 @ 2500	12.5nm/2500rpm
Noise (dBA)	(≤ 7m) 70	(≤ 7m) 70	(≤ 7m) 70
Fuel Tank Capacity (L)	0.45	0.6	3
Net Weight (Kg)	9	13	18
Dimension LxWxH (mm)	280 x 270 x 345	341 x 305 x 318	312x376x335

# General Purpose Engines



## HONDA GX200

**3/4" Q SHAFT - CODE: HAPT015**

**20MM STRAIGHT SHAFT - CODE: HAPT015A**



## HONDA GX390

**(1" STRAIGHT SHAFT - QXA) M/S  
CODE: HAPT004**

**(1" STRAIGHT SHAFT - QXC) M/S  
CODE: HAPT004D**

**(25MM STRAIGHT SHAFT - SXC) M/S  
CODE: HAPT004A**

**('V' TYPE TAPER SHAFT - VSD) M/S  
CODE: HAPT004B**

Model	GX200	GX390
Engine Type	Air cooled 4 stroke OHV petrol engine, 25° inclined cylinder, horizontal shaft	Air cooled 4 stroke OHV petrol engine 25° inclined cylinder, horizontal shaft
Displacement (cm3)	196	389
Net Power	4.1 Kw (5.5 HP) / 3600 rpm)	8.7 Kw (11.7 HP) / 3600 rpm)
Net torque	12.4 Nm / 1.26 Kgm / 2500 rp	26.5 Nm / 2.7 Kgm / 2500 rpm
Noise	-	-
Fuel Tank Capacity (L)	3.10	6.10
Net Weight (kg)	16	31.7
Dimension (mm)	321 x 376 x 346	406 x 460 x 448

# General Purpose Engines



## LONCIN G420F/G420FD PETROL ENGINE

(1" Q SHAFT) M/S - CODE: DPT1046

(1" Q SHAFT) E/S - CODE: DPT1047

('V' TYPE TAPER SHAFT) E/S - CODE: DPT1047A



## LONCIN G270F/G270FD PETROL ENGINE

(1" Q SHAFT) - CODE: DPT1043



## LONCIN D460 DIESEL ENGINE

(1" Q SHAFT) E/S) - CODE: DPTD460QA

('V' TYPE TAPER SHAFT) E/S) - CODE: DPTD460FD

Model	G270	G420	D460
Engine Type	Single cylinder, 4 stroke forced cooling, OHV	Single cylinder, 4 stroke forced cooling, OHV	-
Displacement (cc)	270	420	462
Net Power (Kw/rpm)	6/3600	9/3600	7.5/3600
Net torque	17.7N.m(13.1lbfft)/2500rpm	26.5N.m(19.5 lbfft) /2500rpm	24N.m//2400rpm
Noise (dBa)	≤70dB(A)	≤70dB(A)	-
Fuel Tank Capacity (L)	6	6.5	4.7
Net Weight (Kg)	25	31	51
Dimension (mm)	380×430×410	380×430×410	399×475×500



LONCIN GENERATOR



The innovative range of Loncin generators are around the world. The range offers applications for the professional user in the plant hire, construction & domestic markets looking for quality products at a competitive price. The Loncin Generator range starts with a compact quiet LC2000i inverter generator and goes up to the LC13000 Petrol Generator, so we can provide you with portable power supply for a wide variety of applications.



LC3500A  
PETROL GENERATOR

CODE: DPTLC3500-A

Model	LC3500 A
Fuel Tank Capacity (L)	18
Continuing time (h)	15
Voltage Outlets (Sockets)	(2 x 115V 16A, 1 x 230V 16A)
Voltage Regulator	Automatic Voltage Regulation
Rated Output (Kw)	2.8
Max Output (Kw)	3.1
Starting system	Recoil Start
Noise (dBa)	76
Dimensions	675 x 540 x 540
Weight (kg)	68





**LONCIN LC6500  
PETROL GENERATOR**

**LC6500 - CODE: DPT1007**  
**LC5000 - CODE: DPT1006**

**LONCIN LC8000  
PETROL GENERATOR**

**CODE: DPT1008**

Model	LC5000	LC6500	LC8000
Engine Model	G340F/G340FD	G390F/G390FD	G420F-1/G420FD-1
Displacement (cc)	337	389	420
Fuel Tank Capacity (L)	25	25	25
Continuing time (h)	10	9	8
Voltage Outlets (Sockets)	(2 x 115V 32A, 1 x 230V 21A)	(2 x 115V 32A, 1 x 230V 21A)	(2 x 115V 32A, 1 x 230V 21A)
Voltage Regulator	Automatic Voltage Regulation	Automatic Voltage Regulation	Automatic Voltage Regulation
Rated Output (kW)	4.0	5.0	6.0/6.5
Max Output (kW)	4.5	5.5	6.5/7.0
Starting system	Recoil start/Electic-start	Recoil start/Electic-start	Recoil start/Electic-start
Noise (dBa)	≤76	≤76	≤76
Dimensions (mm)	675×540×540	675×540×540	680×540×540
New Weight (Kg)	74/76	77/79	86/89



**LONCIN LC2000i GENERATOR**  
**CODE: DPT1006**



**LONCIN LC3500i**  
**CODE: DPTLC3500iO**



**LONCIN LC3500i**  
**CODE: DPTLC3500i**

Model	LC2000i	LC3500i	LC3500iO
Engine Model	LC148F	LC170FD-3	LC170F-3
Displacement (cc)	70	212	212
Fuel Tank Capacity (L)	4.2	10	9
Continuing time (h)	7	11	7
Voltage Outlets (Sockets)	(1 x 230V 13A)	(2 x 230V 13A)	(2 x 230V 13A)
Rated Output (kW)	1.6	3.0	3.0
Max Output (kW)	1.8	3.5	3.3
Starting system	Recoil start	Recoil start/Electric	Recoil start
Noise (dBA)	≤61	65	≤72
Dimensions (mm)	499×285×455	579×440×510	482×420×417
New Weight (Kg)	21	45	29



**LONCIN 7500 DIESEL GENERATOR**

**CODE: DPT1013**



**LONCIN LC13000 PETROL GENERATOR**

**CODE: DPT1013**

Model	7500	LC13000
Engine Model	LC188F/D460F	LC2V78FD-1
Displacement (cc)	462	678
Fuel Tank Capacity (L)	14.5	25
Continuing time (h)	7-10	-
Voltage Outlets (Sockets)	(1 x 115V 16A, 1 x 115V 32A, 1 X 230V 32A)	(2 x 115V 32A, 2 x 230V 32A)
Starting system	Recoil start/Electric start	Electric start
Noise	-	-
Dimensions (mm)	685x520x595	868x635x676
Net Weight (Kg)	102	160

# Generators

## STEPHILL GENERATORS

A reliable and robust range of portable generators powered by Honda, Yanmar, Kubota & Perkins engines. Our range starts with a 2.7Kva Petrol generator and goes up to the 120kva Diesel Generator. Ideal for the Hire market but also suited to a wide range of applications including construction, leisure, catering and home standby.



**STEPHILL SE3400  
PETROL GENERATOR**

**CODE: MS001**



**STEPHILL 3.4KVA 4 SOCKET HMS3400  
PETROL GENERATOR**

**CODE: GP0013B**

Model	SE3400	HMS3400
Output (kVA/kW)	3.4/2.7	3.4/2.7
Sockets	BS4343 industrial sockets 1 x 115V 16A sockets 1 x 230V 16A sockets	BS4343 industrial sockets 1 x 115v 16A 1 x 115v 32A 2 x 230v 16A
Engine	HONDA GX200	HONDA GX200
HP/Cylinders	6.5/1	single
Start	Recoil Start	Recoil Start
Fuel Tank (L)	3.6	3.6
Run Time (hrs)	3 @ 75% load	3 @ 75% load
Noise Level (dBA)	71 @ 7 metres	71 @ 7 metres
Size (mm)	L610x W420 x H410	L610x W420 x H410
Weight (Kg)	36	36
Options	Trolley Kit , Plastic Long Run Tank, Single Voltage , AVR,Gas Conversion	Trolley Kit , Plastic Long Run Tank, Gas Conversion



# Generators




**STEPHILL 5000HMS  
PETROL GENERATOR**

**CODE: GP0017**



**STEPHILL 6500HMS  
PETROL GENERATOR**

**CODE: GP0032  
GP0032A (E/S)**

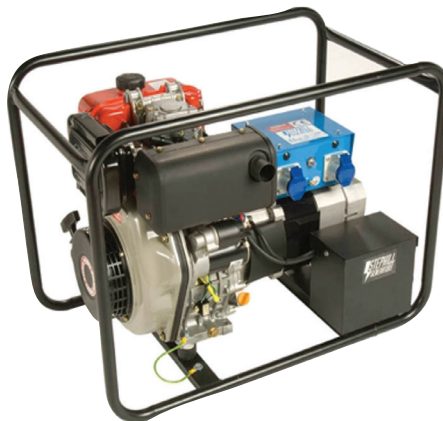

**STEPHILL 6000YMEX  
DIESEL GENERATOR**

**CODE: GP0007C**

Model	5000HMS	6500HMS	6000YMEX
Output (kVA/KW)	5.0/4.0	6.5/5.2	6.0/4.8
Sockets	BS4343 industrial sockets - 1 x 115V 16A sockets 1 x 115V 32A sockets 2 x 230V 16A socket	BS4343 industrial sockets - 1 x 115V 16A sockets 1 x 115V 32A sockets 2 x 230V 16A socket	BS4343 industrial sockets - 2 x 230V 16A socket
Engine	Honda GX270	Honda GX390	Yanmar L100
HP/Cylinders	9.0/1	1	-
Alternator	-	NSM NAC brushless maintenance free alternator, single bearing.	Markon
Start	Recoil Start	Recoil Start	-
Fuel Tank (L)	6	6.5	5.5
Run Time (h)	3.5 @ 75% Load	2.6 @ 75% Load	3.5 @ 75% Load
Frame	-	1" Tubular wrap around	-
Mounts	-	angled anti vibration	-
Noise Level (dBA)	71 @ 7 metres	72 @ 7 metres	75
Dimensions (mm)	L690x W480 x H540	L690 x W480 x H540	L815 x W480 x H620
Weight (kg)	59	71	129
Overload Protection	-	MCB	Reset Button
Options	Trolley Kit, Electric Start, Metal Long Range Fuel Tank, Single Voltage, Gas Conversion	-	-

# Generators



**STEPHILL SE6000D4  
DIESEL GENERATOR**

**CODE: GP0042**



**STEPHILL SE4000DL  
DIESEL GENERATOR**

**CODE: GP0004A**



**STEPHILL SSD10000S  
DIESEL GENERATOR**

**CODE: GP0029A**

Model	SE4000DL	SE6000D4	SSD10000S
Output (kVA/kW)	4.0/3.2	6.0/4.8	10/8.0
Sockets	BS4343 industrial sockets 1x 115V 16a sockets 1x 115V 32a sockets 1x 230V 16a sockets	BS4343 industrial sockets 2 x 115V 16a sockets 1x 115V 32a sockets 1x 230V 16a sockets 1x 230V 32a sockets	BS4343 industrial sockets 1x 115V 16a sockets 2x 115V 32a sockets 1x 230V 16a sockets 1x 230V 32a sockets
Engine	Lombardini 15LD 35OS	YANMAR L100N Electric Start	Kubota D722 water cooled diesel
Hp/Cylinders	1	10/1	3
Fuel Tank (L)	13	24	Integral 37 L
Run Time (h)	13 @ 75% Load	17 @ 75% Load	13 @ 75% Load
Noise Level dBA	71 @ 7 metres 96LWA	71 @ 7 metres. 96LWA	67 @ 7 metres. 92LWA
Size (mm)	L775 x W475 x H560	L1220 x W735 x H885	L1285 x W655 x H90
Weight (Kg)	84	174	355
Options	Single Voltage, electric start Trolley Kit	Single Voltage, 115v CTE.	Two wheel trolley, 3 phase version, single voltage version, ATS panel, remote start box, welfare option kit which includes oil cooler, high efficiency fan and standard ducting. Automatic Voltage Regulator (AVR).Highway Trailer (Ball Hitch), Spark arrestor, chalywn valve.

# Generators



**STEPHILL SSDK12M  
DIESEL GENERATOR**  
**CODE: GP0021**



**STEPHILL SSDK16M  
DIESEL GENERATOR**  
**CODE: GP0028**



**STEPHILL SSDK20M  
DIESEL GENERATOR**  
**CODE: GP0049**

Model	SSDK12M	SSDK16M	SSDK20M
Output	12kVA (9.6kW), 50Hz, 115 / 230 / 400 volt, multi phase.	16kVA (12.8kW), 50Hz, 115 / 230 / 400 volt, multi phase	20kVA (16.0kW), 3ph / 400v 19kVA (15.2kW), 1ph / 230v 19kVA (15.2kW), 1ph / 115v
Engine	Kubota V1505, 3 cylinder water cooled diesel.	Kubota V1703, 4 cylinder water cooled diesel	Kubota V2203, 4 cylinder water cooled diesel.
Alternator	Mecc Alte EC028/S4 brushless maintenance free, AVR controlled alternator, single bearing.	Mecc Alte EC028/2L/4 brushes maintenance free, AVR controlled alternator, single bearing	Mecc Alte EC028/1VL4 brushless maintenance-free with automatic voltage regulator, single bearing.
Fuel Tank	Bunded 120 litre base tank giving 41hours continuous use at 75%load. 3-way valve.	Bunded 120 litre base tank giving 34hrs continuous use at 75% load,3way valve	Bunded 120 litre base tank giving 26 hours continuous use at 75% load,3-way valve
Noise Level	60dB (A) @ 7 metres. 85LWA	63dB(A) @ 7metres. 88LWA	64dB (A) @ 7 metres. 89LWA
Size	L1800mm x W800mm x H1270mm	L1800mm x W800mm x H1270mm	L1800 x W800 x H1270mm
Weight	610kg	665kg dry	695kg (skid version).
dry		Dual Voltage, Automatic Transfer Panel	Dual Voltage, ATS (Automatic Transfer Panel) Highway Trailer
Options	Dual Voltage, Automatic Transfer Panel	Highway trailer	



**STEPHILL SSDK25M  
DIESEL GENERATOR**  
**CODE: GP0043**



**STEPHILL SSDP33  
DIESEL GENERATOR**  
**CODE: GP0045**

Model	SSDK25M	SSDP33
Output Max	25.0kVA (20.0kW), 50Hz, 3Ph 400v 20.0kVA (20.0kW), 50Hz, 1Ph 230v 20.0kVA (20.0kW), 50Hz, 1Ph 115v	33.0kVA / 26.4KW / Multi Phase
Sockets	-	BS4343 industrial sockets - 1 x 400V 32A sockets 3 x 230V 32A sockets
Engine	Kubota V2003-T	PERKINS 1103A-33G
Cylinders	4	3
Alternator	Mecc Alte EC028VL4 brushless maintenance-free. AVR controlled alternator, single bearing.	-
Fuel Tank (L)	120	280
Run Time (hrs)	24 @ 75% Load	48 @ 75% Load
Noise Level (dBA)	64 @ 7 metres. 89LWA	64 @ 7 metres. 89LWA
Size (mm)	L1800 x W800 x H1270	L2050x W1000 x H1490
Weight (kg)	715 (skid version).	1300 (skid version).
Options	ATS ( Automatic Transfer Panel ) Highway Trailer	ATS ( Automatic Transfer Panel ) Highway Trailer (Twin axle)



# Generators



**STEPHILL SSDP50  
DIESEL GENERATOR**

**CODE: GP0057**



**STEPHILL SSDP70  
DIESEL GENERATOR**

**CODE: GP0045**



**SSDP120  
DIESEL GENERATOR**

**CODE: GP0045**



**DUAL VOLTAGE TEST CENTRE**

**CODE: GP0015**

Model	SSDP50	SSDP70	SSDP120
Output	50kVA (40.0kW), 3ph / 400v 50kVA (40.0kW), 1ph / 230v	67kVA (53KW), 50HZ / 3ph 400/230V	117.1kVA / 93.7kVA
Sockets	-	-	1 x 16a 230v / 2 x 32a 230v / 1 x 32a 400v / 1 x 63a 400v / 1 x 125a 400v
Engine	Perkins 1103A-33TG1	Perkins 1103A-33TE2	Perkins 1104D-E44TAG2
Hp/Cylinders	3	3	135.4 / 4
Alternator	50kVA ECO 32-1L/4 Mecc Alte single bearing brushless maintenance-free alternator with 3 Phase UVR6 automatic voltage regulator.	60kVA ECO 32-2L/4 Mecc Alte single bearing brushless maintenance-free alternator with 3 Phase UVR6 automatic voltage regulator.	-
Start	-	-	Electric start
Fuel Tank (L)	350	350	470
Run Time (hrs)	42 @ 75% load	33 @ 75% load	24 @ 75% load
Noise Level (dBA)	63 @ 7 metres / 88LWA	63 @ 7 metres. 88LWA	66 @ 7 metres
Size (mm)	L2450 x W1000 x H1490	L2450 x W1000 x H1490	L2710 x W1100 x H1650
Weight (kg)	1380 dry, 1670 wet. (skid base version).	1410 dry, 1700 wet. (skid base version)	1906
Options	Twin axle braked road tow trailer with full lighting panel and ring hitch as standard or ball hitch option, AMF/ATS panels, engine coolant heater	Twin axle braked road tow trailer with full lighting panel and ring hitch as standard or ball hitch option, AMF/ATS panels, engine coolant heater	-

# Heating & Cooling



This family includes mobile space heaters for temporary mobile or emergency heating, outdoors or indoors, at a relatively low price and, most important, without need of installation. These heaters are easy to handle and move, sturdy, reliable, and flexible, making them perfect for the building sector (yards, construction projects, etc.) and in temporary structures or shelters (tents, tensile structures, etc.). These are generally single-fuel-fired products (diesel or gas) with wheels and/or handles, and fit with accessories for a wide variety of applications.



**BIEMMEDUE GE20 DIESEL/KEROSENE  
SPACE HEATER 75,000 BTU**

**CODE: HRP00131**



**BIEMMEDUE GE36 DIESEL/KEROSENE  
SPACE HEATER 132,000 BTU / 168,000 BTU**

**E36 - CODE: HRP00021E**

**E46 - CODE: HRP00031**



**BIEMMEDUE FIRE 25 DIESEL  
INFRARED HEATER 88,000 BTU**

**CODE: HRP0067**

Model	GE 20	GE 36	GE 46	Fire 25
Rated heating power (Kw)	21.4	38.4	49	25
Heat efficiency	100%	100%	100%	100%
Air Flow (m <sup>3</sup> /h)	350	605	1400	-
Air Temperature	170	177	97	-
Fuel Consumption (kg/h)	1.69	3.04	3.88	2.04
Tank Capacity (L)	17	42	42	43
Power Consumption 230v	200	232	400	-
Electrical Power (V-hp-Hz)	230-1-50	D/V 110V/220V	D/V 110V/220V	D/V 110V/220V
BTU	75,000	132,000	168,000	88,000
Weight (Kg)	20	25	38	42

# Heating & Cooling

## GP30 MOBILE GAS DIRECT FIRED SPACE HEATER 52,000 BTU

**CODE: HRP00094**



## GP45M MOBILE GAS DIRECT FIRED SPACE HEATER 78,000 BTU

**CODE: HRP00092**



## GP65M MOBILE GAS DIRECT FIRED SPACE HEATER 110,000 BTU

**CODE: HRP00093**

Model	GP 30 M	GP 45 M	GP 65 M	GP 90 M
Max Heating Power (kW)	31.4	19.8÷52.3	30.2÷73.6	32.6÷96.5
kcal/h	27.000	17.000÷45.000	26.000÷63.300	28.000÷83.000
Air Output (m <sup>3</sup> /h)	1.100	1.400	2.100	3.260
Temperature Rise (a 20° C)	49	42÷110	43÷104	29÷88
Consumption and Feeding Pressure G31 (kg/h - bar)	90 - 1.5 ÷ 0.4	1,54/4,06-500/2.000	2,36/5,72-500/2.000	2,53/7,50-500/2.000
Electrical Power (V, ~, Hz)	230, 1, 50	230, 1, 50	230, 1, 50	230, 1, 50
Power Absorption (W)	90	125	180	325
Weight (Kg)	10	13.6	14	-
BTU	52000	78000	110000	-

# Heating & Cooling



**BIEMMEDUE EC32 116,000 BTU /  
BIEMMEDUE EC55 DIESEL /KEROSENE  
SPACE HEATER 200,000 BTU**



**BIEMMEDUE EC85 DIESEL/KEROSENE  
SPACE HEATER 274,000 BTU**

**EC32 HEATER ONLY: HRP0017-0  
EC32 C/W CHINMEY  
CAP, DUCT & DUCT ADAPTOR: HRP0017**

**EC55 HEATER ONLY: HRP0018-0  
EC55 HEATER C/W CHIMNEY CAP, DUCT &  
DUCT ADAPTOR: HRP0018**



**EC85 HEATER ONLY: HRP0091-0  
EC85 HEATER C/W CHIMNEY CAP, DUCT  
& DUCT ADAPTOR: HRP0091**

Model	EC 32	EC 55	EC 85
Rated heat power (kW)	34.1	58.6	90.6
Output heat power (kW)	28.9	52.5	80.2
Heat efficiency %	84.6	89.5	88.5
Air Flow (m <sup>3</sup> /h)	1150	2500	4300
Temperature Rise	75	66	77
Fuel Consumption (Kg/h)	2.7	4.64	7.17
Tank Capacity (L)	42	65	105
Power Consumption 230V (W)	370	850	1140
Electrical Power (V-ph-Hz)	230 - 1 - 50	230 - 1 - 50	230 - 1 - 50
Flue (mm)	150	150	150
Outlet Hose (mm)	300	350 - 300	400 - 300
Dimensions LxWxH (mm)	1215x440x670	1435x555x940	1740x690x1025
Weight (Kg)	48	81	110



# Heating & Cooling

## FORMULAS AND EQUIVALENCES

### HEATING POWER CALCULATION

$$V \times \Delta T \times K = [\text{KCAL/H}]$$

**V** = Volume: Length x Width x Height (m<sup>3</sup>)

**ΔT** = Is the difference between external temperature and required internal temperature.

**K** = Coefficient of loss heat according to the standard of insulation in your building.

K = 0.6 - 0.9      Good insulation: double wall, insulating ceiling material, insulating wall and floor material, double glazed windows and insulated doors.

K = 1.0 - 1.9      Reasonable insulation: double wall, insulating ceiling material and few windows with single glasses.

K = 2.0 - 2.9      Fair insulation: simple walls with glazed parts and non insulated roof.

K = 3.0 - 4.0      Little or no insulation: wood covers, plate or plastic materials.

#### Example of heating power calculation

V = 20m x 6m x 4m V=480m<sup>3</sup>

ΔT= 10 °C T est. + 24 °C Tint. ΔT= +34 °C

K=4.0

$$480\text{m}^3 \times 34\text{ }^{\circ}\text{C} \times 4.0\text{K} = 65.280 \text{ (kcal/h)}$$

## EQUIVALENCES

### Heating Power

1 kW = 860.61 kcal/h

1 kW = 3415.18 BTU/h

1 kcal/h = 3.97 BTU/h

### Pressure

1 bar = 14.504 PSI

1 bar = 10<sup>5</sup> Pa

1 mm H<sub>2</sub>O = 9.806 Pa

### Consumption

1 l/h = 0.2641 Gallon/h

1 l/h = 0.22 Gallon (UK)/h

1 m<sup>3</sup>/h = 35.31 CFh

### Temperature

°F = 9/5 x °C + 32

°K = °C + 273.15

### Dimensions

1 mm = 0.03937 Inches

1 mm = 0.00328 Feet

### Surface

1 m<sup>2</sup> = 1550.03 inches<sup>2</sup>

1 m<sup>2</sup> = 10.764 Feet<sup>2</sup>

### Capacity

1L = 0.2641 Gallon

1L = 0.22 Gallon (UK)

### Weight

1 Kg = 35.274 Ounces

1 Kg = 2.205 Pounds

### Flow

1 m<sup>3</sup>/h = 0.5885 cfm

# Heating & Cooling



**INDUSTRIAL F33 FAN HEATER**  
**CODE: 115V - HRP0010A**  
**CODE: 230V - HRP0010**



**INDUSTRIAL FF23 FAN HEATER**  
**CODE: HRP0014**



**RG308 ELECTRIC INFRARED HEATER**  
**CODE: 110V - HRP002**  
**CODE: 220V - HRP0025**

Heavy Duty Construction  
Quick to Heat  
Fully Portable with 2 Lockable Wheels  
2.5 m Power Cable  
2x 1.4 kW Ceramic Bulbs

Model	FF3	FF23	RG308
Airflow Rate (m <sup>3</sup> )	423	1850m <sup>3</sup> /hr Pressure 90pa	-
Fan Type	Radial	Radial Sensible	-
Heat Capacity	10236 BTU (3kW equivalent)	78,476 BTU (23kW equivalent)	1.6 kW
Max Heat Capacity (kcal)	17497	17497	-
Supply	110V/230V 50hz	400v 50hz	110v 50hz
Plug Size	32A (110V) 13A (230V)	32A	16A/32A
Sound (dBA) (3m)	45	60	-
Mobility	Portable	Portable	Portable
Remote Thermostat	Optional	Optional	-
Dimensions HxWxD (mm)	360x300x330	415x345x504	917x421x171
Weight (Kg)	10Kg	20kg	14kg
Overtemp protection	Yes	Yes	-
Thermostat	-	Fitted As Standard	-
Filaments	-	-	2x800w Carbon Fibre

# Heating & Cooling

## VAL HEATERS

The VAL6 range offers the most efficient heating in its class by using radiant heat technology. VAL6 offer a high quality range of reliable, highly efficient radiant heater. Manufactured in Japan.



### VAL 6 DAYSTAR INFRARED DIESEL/KEROSENE HEATER

The Daystar provides perfect heating with its well-honed technology for spot space heating in a large open area. The "Daystar" will usher in a new era of high efficiency 'Oil fired' space heating with 100% heat recovery from the oil burnt.

CODE: HRP00011



### VAL 6 HG125NA INFRARED DIESEL/KEROSENE HEATER

"Hotgun" spot space heater heats the air with its high efficiency combustion system, and a conversion rate from fuel to energy of nearly 100%. This remarkable technology achieves very quiet combustion of 69dB, high efficiency and long-running time with hottest air flow on the market.

CODE: HRP0001B

Model	VAL 6 DAYSTAR	VAL 6 HG125NA
Heat Output	13,000kcal/h (15KW)	116,000BTU/h (34kW)
Fuel	Kerosene, #1 Diesel	Kerosene, #1 Diesel
Tank capacity (L)	10	54
Power Source	230V/50Hz	110V/50Hz, 120V/60Hz
Power Consumption(W)	130	150
Control System	5sec. Prepurge	
Safety Device	Photocell Flame Monitor	PHOTOCELL FLAME MONITOR
	3A (1.6A) Fuse	3A FUSE
	Overheat Prevention System	
	Tip-Over Switch	
Fuel Consumption (l/h)	1.5	3.4
External Dimension (HxWxD)	593X310X600 (mm)	30.7x22.3x28.1 (in)
Dry Weight (Kg)	18	38
Accessory	THERMOSTAT CONNECTOR	THERMOSTAT TERMINALS

# Heating & Cooling



## VAL 6 KBE1S INFRARED DIESEL/ KEROSENE HEATER

Because of framed structure, KBE series is active in oppressive job site such as construction site or mining around the world.

**CODE: HRP0001A**



## VAL 6 EP6JA INFRARED DIESEL/ KEROSENE HEATER

VAL6 EP6JA is the best-known long-selling product infrared oil heater in Europe since its debut in 1979 and remains the best known and most efficient solution in this segment.

**CODE: HRP0001A**



## VAL 6 EPX INFRARED DIESEL/ KEROSENE HEATER

With the enlarged combustion chamber/disk and improved atomization, coexistence of power and economy is now possible with EPX.

**CODE: HRP0001A**



## VAL 6 KBE5L INFRARED DIESEL KEROSENE HEATER 115V

Because of framed structure, KBE series is active in oppressive job site such as construction site or mining around the world.

**115V - CODE: HRP00010 / 230V - CODE: HRP0001**

Model	KBE1S	KBE5L (2-STEP)	VAL 6 EPX	VAL 6 EP6JA
Heat Output	28000 Kcal (32.5KW)	High: 118,000 BTU/hr - Low: 100,000	35,000 kcal/hr	34,500kcal (40kW)
Fuel	Kerosene, #1 Diesel	BTU/hr Diesel, Kerosene	Kerosene, #1 Diesel	Kerosene, #1 Diesel
Tank Capacity (L)	35	57	58	40
Power Source (V/Hz)	230/50	120/60	230/50	230/50
Power Consumption (W)	60	150	117	65
Control System	5sec. Prepurge	-	5sec. Prepurge	5sec. Prepurge
Safety Device	Photocell flame monitor	Photocell flame monitor,	Photocell flame monitor	Photocell flame monitor
	1..6A Fuse	3A Fuse, Tip-over switch	Overheat Protection	1..6A Fuse
			Overvoltage protection	
			Tip-over sensor	
Fuel Consumption (l/h)	3.21	-	3.19 kg/hr	3.8
External Dimension (HxWxD)	810X655X695(mm)	36.3 x 28.0 x 29.2 in	970x645x1,235 (mm)	965x630x1170 (mm)
Dry Weight (Kg)	38	42	50	53
Accessory	Thermostat Terminals	-	-	Thermostat Connector



# Heating & Cooling

## VENTILATOR / FUME EXTRACTOR



### PREDATOR 12" FUME EXTRACTOR

- FAN C/W DUCT 110V - CODE: DEPT005A
- FAN ONLY 110V - CODE: DEPT005D
- FAN C/W DUCT 230V - CODE: DEPT005B
- FAN ONLY 230V - CODE: DEPT005F
- LENGTH OF DUCT 5 METRES - CODE: DEPT005C

### 32" PREDATOR COOLING FAN

- 110V - CODE: DEPT0013

Model	12" Fume Extractor	32" Cooling Fan
Voltage (V)	110 or 230	110
Power Input (W)	550	1200
Diameter (mm)	300	400
Air Flow (m <sup>3</sup> /min)	62	420
Noise Level (dBA)	68	79
Duct Length (m)	5	-
Quality Approvals	Ce, Gs, Rohs	Ce, Gs, Rohs
Weight (kg)	14.5	49

# Hydraulic And Pneumatic Breaking Equipment

The benefits of hydraulic tools are numerous. Hydraulic systems are cheaper to buy, run and maintain, leading to obvious cost reductions for the operator. The rugged design of the machinery also offers trouble-free performance and powerful, but economic performance.



## HPP06 POWER PACK

**HPP06 POWER PACK ONLY -**

**CODE: HYC0010**

**HPP06 C/W HH15 HAMMER & HOSE -**

**CODE: HYC009F**



## HPP09 POWER PACK

**HPP09 POWER PACK ONLY -**

**CODE: HYC001**

**HPP09 C/W HH20 HAMMER & HOSE-**

**CODE: HYC001A**

Model	HPP06	HPP09
Oil flow, l.p.m.	1x18	1X20
Max. pressure (bar)	110	150
Engine	Honda 6.5 HP petrol	Honda 9 HP petrol
Flow	Adjustable	Adjustable
Starter	Recoil	Recoil
Weight (kg)	54	68
Noise level (1m LPA dBA)	88	88
Noise level (LWAdB)	100	100



**HH15 HAMMER - CODE: HYC001D**

**HH20 HAMMER - CODE: HYC002**

## HH20/HH15 BREAKING HAMMER

The unique PROLINE handle offers the operator a vibration level down to as little as 4.8 m/s<sup>2</sup>, which give maximum protection and less fatigue. The result is higher efficiency – you get more work done.


The breakers have very few wearing parts ensuring the lowest lifetime cost possible. A HYCON breaker gives you the best TCO (Total Cost of Ownership). Quality is never an accident – it is always the result of intelligent effort.

Model	HH15	HH20
Type	Hydraulic	Hydraulic
Weight (kg)	15.3	22
Flow	20	20
Pressure	100	110
Energy (W)	3.333	3.667
Striking energy (Jls)	40	60
Blows/min	1.830	1.560
striking energy (W)	1.220	1.560
Performance (W/kg)	80	71
Vibration m/s <sup>2</sup>	4.4	4



## THE HYCON SYSTEM

- **ONLY 1 PACK** - And a lot of opportunities are available

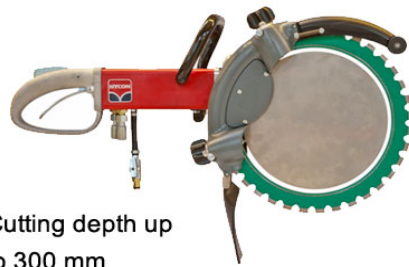

- ★ Cutting depth up to 300 mm



- ★ Drill up to 350 mm handheld



- ★ Capacity up to 204 m<sup>3</sup>/hour



- ★ Most powerful 10 kg breaker



- ★ Perfect to drive posts everywhere



- ★ Cut up to 187 mm at low cost



- ★ compact all-round breaker

- ★ The HYCON product line includes further
- ★ a rock drill, an oil flow
- ★ divider and an earth drill

# Log Holders & Splitters

Award winning designed saw horses, log holders and log splitters. Our log splitters are fitted with a unique and patented Duocut blade that offers twice the efficiency of any other log splitter on the market.



**ULTIMATE SAW HORSE**  
**CODE: CSA003**

The Ultimate Saw Horse (patent pending) can handle logs, timber or any other type of wood. The unique chain locking method makes one man operation simple and combined with the toothed v clamp secures the log against rotation when cutting with a chainsaw. The Ultimate Saw Horse needs minimum initial assembly and then simply folds for easy storage and transport then opens and is ready for use.



**QUICK FIRE SAW HORSE**  
**CODE: CSA006**

The new Quick Fire Saw Horse (patent pending) holds the log firmer, safer and is quicker to use than any other similarly priced log saw horse. No adjustments will be required to accommodate different sized logs. The independently pivoting teeth automatically adjust to grip the log all round. The whole log can be cut without having to move it. Comes ready for use straight out of the box, no need for assembly and folds flat for storage.

Ultimate Saw Horse	Quick Fire Saw Horse
- Easy 1 man operation	- Easy rapid load
- Quickly folds & opens for use	- Quickly folds & opens for use
- Holds logs or timber securely	- Holds logs or timber securely
- Maximum Log Length 6M	- Maximum Log Length 4M
- Log diameter of 50 - 360mm	- Log diameter of 50 - 250mm
- Maximum Log Weight 300kg	- Maximum Log Weight 150kg
- Can hold multiple logs	- Folds flat for storage
- Folds flat for storage	- Height 900mm
- Height 750mm	- Length 1100mm
- Length 1300mm	- Width 380mm
- Width 500mm	- Weight 9.8kg
- Weight 12.7kg	



# Log Holders & Splitters



## V-SMART SAW HORSE

The Smart wood holder folds flat and is easily portable. The folded size is 1180 x 380mm x 50mm and weighs only 12kg. Fully adjustable gripping jaws that can be set to different diameters to suit the width of logs and wood. The Smart holder is quick to set up and take down. Made from the highest quality materials, the workhorse that is designed to keep on going for years. Holds logs and timber from a diameter of 25mm to 230mm and virtually any length

**CODE: CSA001**



## DUOCUT ELECTRIC LOG SPLITTER

The FM10T is a 5 ton electric log splitter with Duocut capability. The FM10T is fitted with our Duocut blade, which is a community registered design and unique to our log splitters. It has a ram pressure of 400 bar\*, which enables it to handle most woods that will be split domestically. If you are splitting woods like oak then consider the more heavy-duty, powerful log splitter the FM16

**FM10 - CODE: TAO001**

**FM16 - CODE: TA0002**



## FM6 VERTICAL LOG SPLITTER

**CODE: TAO010**

V-smart Saw Horse	Duocut Electric
- Thickness of wood: 2.5 - 23 cm	- Efficient twin blade operation
- Length of wood: no limit	- Force 4 tons / 5 tons
- Length: 118 cm	- Splitting Capacity (Duocut blade) 8 tons / 10 tons
- Width: 38 cm	- Motor 1500 W / 2200W
- Height, disassembled: 5 cm	- Max log length (single blade) 370mm / 520mm
- Height, assembled: 95 cm	- Max log length (Duocut blade) 300mm / 450mm
- Working height: 60 cm	- Max log diameter 250 mm (500 mm Duocut)
- Weight: 12kg	- Weight 37kg / 47kg
	- Supplied with Duocut blade and stand



HIRE TECH WALLPAPER STRIPPER

CODE: HIRT07180

The HTW Steam Wallpaper Stripper designed for the tool rental and professional decorating markets, is the most productive, safest and easiest to use steam wallpaper stripper.

HIRE TECH H/D WALLPAPER PERFORATOR HTP-2 230V

CODE: HTP09060

The HTP Wallpaper Perforator is a high quality hand tool designed to quickly and safely perforate all types of wall covering to speed the penetration of steam for fast, effective wallpaper stripping. The HTP is the perfect partner to the HTW Steam Team Wallpaper Stripper.

Model	HTP-2 perforator	Model	HTW-5 stripper
Configuration	Angled V shaped head	Heater element	220/240V 50/60Hz - 2500W
Perforator Rollers	2 chrome plated spiral spiked rollers, 56 pins per roller with nylon brushes	Tank Capacity	7Litres
Yoke	Injected moulded glass reinforced rynite	Steam Plate Weight	800g
Handle	Steel tube with easy grip soft rubber cover (L:435mm) (17")	Power Cable	7m (23")
Total Length	530mm (21")	Dimensions	224x554x382mm
Net Weight	0.7kg (1.54lbs)	Net Weight	7kg (15lbs)

# Paint Sprayer & Decorating



## Q TECH QP025 PAINT SPRAYER

**CODE: ASP001E**



## TRITECH T5 AIRLESS PAINT SPRAYER

Trittech offer Innovations in design utilizing high quality unique materials and an efficient manufacturing process - the result is a precision built airless sprayer that lasts longer than any other unit in their class.

**CODE: ASP001G**



## Q-T3 HVLP PAINT SPRAYER & Q TECH 3.8L CONDITIONER

**SPRAYER - CODE: ASP001F**

**CONDITIONER - CODE: ASP400011**


Model	QP025	Trittech T5	QT3
Maximum tip size (")	0.025"	0.025"	-
Flow per minute (L)	2.9	2.27	2.8
Max pressure (bar/psi)	207/3000	227/3300	0.41/6.0
Weight (kg)	35	16.8(carry) 30.4(cart)	8.5
Maximum hose & lead length	90 metres	-	-
Power supply	Single phase electric 110v	Single phase 110v	single phase 110v
Motor (W)	1300	820 PMDC	1400

# Plumbing

## EGA MASTER

EGA Master S.A. is a manufacturer of High Quality industrial tools located in the Basque Country, the industrial heartland of Spain. Although originally born as specialists in Piping Tools, the company has steadily diversified into other fields offering now the broadest range for the most demanding industries such as oil & gas, mining, aerospace, automotive or civil engineering.

**EGA Master** S.A.  
ART IN INNOVATION

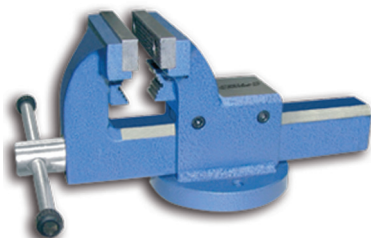

**69632**  
**EGA MASTER 6" BENCH VICE**  
**CODE: EMP008A**



**61206**  
**EGA MASTER CHAIN VICE**  
**CODE: EMP008**



**61200**  
**EGA MASTER CHAIN VICE STAND**  
**CODE: EMP011**



**69052**  
**EGA MASTER 1/2" TO 2" MANUAL THREADER**  
**CODE: EMP006**



**60152 / 60162**  
**EGA MASTER ROSCAMATIC 2 ELECTRIC THREADER 110 V**  
**CODE: EMP010**



**60005**  
**EGA MASTER MANUAL TEST PUMP**  
**CODE: EMP001**



**60225**  
**EGA MASTER 110 VOLT TEST PUMP**  
**CODE: EMP0012**



**60015**  
**EGA MASTER 1/4" TO 2" PIPE BENDER**  
**CODE: EMP003**



**60016**  
**EGA MASTER 1/4" TO 3" PIPE BENDER**  
**CODE: EMP004**



# Power Tools



**MILWAUKEE M18 CHX FUEL SDS+ HAMMER DRILL**

**CODE: MIL4933448173**



**MILWAUKEE M18 CHPX FUEL SDS+ HAMMER DRILL**

**CODE: MIL4933451382**



**KEYANG DH3600L 36V SDS HAMMER DRILL**

**CODE: KPTDH3600L**



**MILWAUKEE M18 CDE-0 FUEL SDS+ DUST EXTRACTOR**

Designed to collect dust effectively with automatic operation from the tools on/off trigger switch. HEPA Filter: widely regarded as the ultimate filter that traps all Sizes of particles with an efficiency rating of 99.75%. Large dust collection box Dust extraction aluminium tube is adjustable according to the size of the drill bit and length 16 mm max and 90 mm depth Compatible with M18 CHX

**CODE: AEGM108**

Model	CHX-502X	CHPX-502C	DH3600L
Battery Pack	5.0	5.0	3.0 Ah
Battery Type	Li-ion	Li-ion	Li-ion
Blow energy (EPTA)(j)	2.5	4.0	3.0
By technology new	Fuel	Fuel	-
Charger supplied	59min	100min	-
Max drilling concrete (mm)	26	28	28
Max drilling steel	13	13	13
Max drilling wood (mm)	30	30	30
Max percussion rate (bpm)	0 - 4900	0 - 5000	0-5010
No load speed (rpm)	1 - 1400	1 - 1350	0-1150
Optimised drilling capacity in concrete (mm)	6 - 20	7 - 22	4-18
Vibration chiselling (m/s <sup>2</sup> )	9.5	7.1	1.5
Vibration drilling (m/s <sup>2</sup> )	8.9	8.6	7.5
Voltage	18	18	36
Weight with battery pack (Kg)	3.5	4.3	4.8

# Power Tools



**MILWAUKEE PLH28XE 110V/220V SDS+ 3  
MODE HAMMER C/W FIXTEC**

**110V - CODE: AEGM104A**

**220V - CODE: AEGM104**



**MILWAUKEE PH27X 110V/220V SDS+ 3  
MODE HAMMER C/W FIXTEC**

**110V - CODE: MIL4933448471**

**220V - CODE: MIL4933448960**



**20MM X 250MM CHISEL T/S SDS+  
HAMMER**

**CODE: MIL4932339626**

**250MM POINT T/S SDS+  
HAMMER**

**CODE: MIL4932339625**

Model	PLH 28XE	PH27X
Blow Energy (EPTA)(J)	4.1	2.8
Full load hammer action (bpm)	0 - 4000	0 - 4800
Full load speed (rpm)	0 - 1000	0 - 1300
Max drilling concrete (mm)	28	26
Max drilling steel (mm)	13	13
Max drilling wood (mm)	40	30
No load speed (rpm)	0 - 1500	0 - 1600
Power Input	800	800
Sound Power Level (dBA)	101.8	-
Sound pressure level (dBA)	90.5	-
Vibration chiseling (m/s <sup>2</sup> )	6.8	10.2
Vibration drilling (m/s <sup>2</sup> )	10.6	11.4
Weight (Kg)	3.6	3.0

# Power Tools



**K500ST 110V SDS MAX  
BREAKING HAMMER**

**CODE: AEGM060C**



**KEYANG PHD40MV ROTARY  
HAMMER DRILL**

**CODE: KPTPHD40MV**



**MILWAUKEE K540S COMBI SDS MAX  
HAMMER DRILL**

**CODE: AEGM060B**



**KH5000M SDS MAX DELOLITION  
HAMMER**

**CODE: KPTKH5000M**



**MILWAUKEE M18 CHM-902C SDS MAX  
COMBI HAMMER DRILL**

**CODE: MIL4933451412**



**MILWAUKEE K545S 110V SDS MAX  
HAMMER DRILL**

**CODE: AEGM060**

Model	K500ST	K540 S	K545 S	CHM-902C	PHD40MV	KH5000M
Battery Pack Capacity (Ah)	-	-	-	9.0	-	-
Battery Type	-	-	-	Li-ion	-	-
Blow Energy (EPTA)(J)	7.5	7.5	8.5	6.1	-	7.5J
Full load hammer action (bpm)	3000	3000	2840	3000	1,350~2,870	3500
Full load speed (rpm)	-	430	350	-	-	-
Max drilling concrete (mm)	-	40	45	40	40	-
No load speed (rpm)	-	450	450	450	235~500	-
Power Input (W)	-	-	-	-	1100	1050
Vibration chiseling (m/s <sup>2</sup> )	16.7	16.7	9	9.6	7	-
Vibration drilling (m/s <sup>2</sup> )	-	-	-	10.6	8.5	-
Input Voltage (V)	110/220	110/220	110/220	18	110	110
Weight (Kg)	5.9	6.3	6.7	6.6	6.4	5.4

# Power Tools



**MILWAUKEE K900S 110V SDS MAX BREAKING HAMMER**

**CODE: AEGM064**



**MILWAUKEE K750S 110V SDS MAX HAMMER DRILL**

**CODE: AEGM067**



**BOSCH GSH11E SDS MAX BREAKING HAMMER**

**CODE: BOS007**



**BOSCH GBH8D SDS MAX HAMMER DRILL**

**CODE: BOS009**



**BOSCH GSH27VC DEMOLITION HAMMER**

**CODE: BOS022**

**25MM X 400MM CHISEL T/S SDS MAX HAMMER: MIL4932343738**  
**400MM POINT T/S SDS MAX HAMMER: AEG4932343735**  
**CHISEL T/S GSH27VC: EA094**  
**POINT T/S GSH27VC: EA099**  
**TAR SPADE T/S GSH27VC: EA206**

Model	K750S	K900S	GSH11E	GBH8D	GSH27VC
Blow Energy (EPTA)(J)	11.9	20	5-18	12.5	62 J
Full load hammer action (bpm)	2740	975-1950	-	1.380 - 2.720	1000
Full load speed (rpm)	240	-	250	0 - 305	-
Max drilling concrete (mm)	50	-	-	45	-
Max drilling steel (mm)	-	-	-	-	-
Max drilling wood (mm)	-	-	-	-	-
No load speed (rpm)	300	-	-	-	-
Power Input (W)	1550	1600	1500	1500	2000
Sound Power Level (dBA)	107.4	105	-	-	-
Sound pressure level (dBA)	96.4	-	-	-	-
Vibration chiseling (m/s <sup>2</sup> )	9.1	11	15	-	-
Vibration drilling (m/s <sup>2</sup> )	9.5	-	24	-	-
Weight (Kg)	8.2	11.0	11.1	8.2	29.5



# Power Tools



**MILWAUKEE M18FID-502X  
IMPACT DRIVER**

**CODE: MIL4933451128**



**MILWAUKEE M18FIWF38-  
502X IMPACT WRENCH**

**CODE: MIL4933451074**



**MILWAUKEE M18FIWF12-  
502X IMPACT WRENCH**

**CODE: MIL4933451072**



**MILWAUKEE M18CHIWF12-  
502X M18 FUEL FRICTION  
RING 1/2" IMPACT WRENCH**

**CODE: MIL4933448103**



**MILWAUKEE M18CHIWF34-  
502X M18 FUEL FRICTION  
RING 3/4" IMPACT WRENCH**

**CODE: MIL4933448108**

Model	FID-502X	FIWF38-502X	FIWF12-502X	CHIWF12-502X	CHIWF34-502X
Battery Pack	5.0	5.0	5.0	5.0	5.0
Battery Type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
Impact Rate	1800/2900/3700/0-3700	1900/2300/3100/2300	2400/2600/3100/2600	0 - 450 / 0 - 2300	0-1700 / 0-2300
Max Fastening Torque (Nm)	203	284	300	135/950	508 / 1016
Max Torque (Nm)	26/80/203/0-203	40/100/284/100	40/120/300/120	135/950	1626
No load speed (rpm)	850/2100/3000/0-3000	900/1600/2500/1600	1700/2000/2500/2000	0 - 425/0 - 1700	0-1200 / 0-1700
Vibration impact (mis <sup>2</sup> )	11.4	6.7	7.7	11.08	14.88
Weight Kg	1.7	-	1.8	3.3	3.3

# Power Tools



**MILWAUKEE M18 CAG115XPDB  
BRAKING GRINDER**

**CODE: MIL4933451542**



**MILWAUKEE 4.5" AG800E GRINDER  
110/220V**

**110V - CODE: MIL4933451215**

**220V - CODE: MIL4933451214**



**MILWAUKEE 9" AGV22 GRINDER  
110/220V**

**110V - CODE: MILAG22-230DMS**

**220V - CODE: MILAG22-230DMS2**



**MILWAUKEE C18HZ-0 COMPACT  
HACKZALL - ONE HANDED HACK SAW**

**CODE: AEGM079A**



**MILWAUKEE M18CSX SABRE SAW**

**CODE: MIL4933451379**



**MILWAUKEE SSD1100X 110/120V  
SABRE SAW**

**CODE: MILSSD1100X**

Model	CAG115XPDB-502X	AG800-115E	AGV22	C18HZ-0	CSX-502X	SSD 1100X
Battery Pack	5.0	-	-	-	5.0	-
Battery Type	Li-ion	-	-	Li-ion	Li-ion	-
Braking time	< 2	-	-	-	-	-
By new technology	Fuel	-	-	Brushed	Fuel	-
Charger	59 min	-	-	-	59min	-
Cutting Depth (mm)	28	28	68	-	-	-
Disc diameter (mm)	115	115	230	-	-	-
No load speed (rpm)	8500	11500	6600	0 - 3000	-	-
Weight Kg	2.7	2.0	5.4	1.8	4.1	3.2

# Power Tools



**MILWAUKEE SSPE1500X 110V  
SABRE SAW**

**CODE: AEGM008**



**MILWAUKEE HD18BS-402  
BAND SAW**

**CODE: AEGM058**



**MILWAUKEE M18 CBS125-502  
METAL CUTTING BAND SAW**

**CODE: MIL4933448198**



**MILWAUKEE M18FMDP-502 FUEL  
MAGNETIC DRILL**

**CODE: MIL4933451012**



**PREDATOR MD350N 110/220V  
MAGNETIC DRILL**

**110V - CODE: DPT010  
220V - CODE: DPT010A**




**PREDATOR MD500-2 110V LARGE  
MAGNETIC DRILL**

**CODE: DPTSP009**

Model	SSPE 1500X	HD18BS	CBS125-502	FMDP-502	MD350N	MD500-2
Battery Pack (Ah)	-	4.0	5.0	5.0	-	-
Battery Type	-	Li-ion	Li-ion	Li-ion	-	-
No load stroke rate (spm)	0 - 2800	-	-	-	-	-
No load speed (rpm)	32	146	0-116	400/600	620	380/500
Weight Kg	-	4.8	7.3	13.0	12.6	21.1
Max Cutting Capacity Metal (mm)	-	85	125	38	35	50

# Power Tools

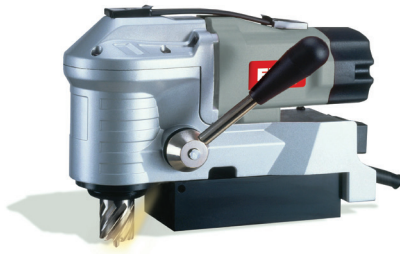

**PREDATOR LOW PROFILE MAG  
DRILL PMD3530N**

**CODE: DPTSP010**



**EIBENSTOCK EHB 16/2.4 HIGH  
TORQUE STEEL DRILLING MACHINE**

**CODE: EHB16/2**



**EIBENSTOCK EHB 32/4.2 HIGH  
TORQUE STEEL DRILLING MACHINE**

**CODE: EHB32/2**



**MILWAUKEE HD18SG STRAIGHT  
GRINDER**

**CODE: MIL4933417820**



**PREDATOR SG6 STRAIGHT  
GRINDER**

**CODE: DPT024**



**MILWAUKEE CHS355 350MM METAL  
CUTTING CHOP SAW 110/220V**

**110V - CODE: AEGM071  
220V - CODE: AEGM072**

Model	EHB 16/2.4	EHB 32/4.2	HD18SG	SG6	CHS355	PMD3530N
Collect capacity (mm)	-	-	6	-	-	-
Power Input (W)	1100	1700	-	1300/1500	2300	1100
Rated Volatage (V)	230	230	-	110-120 / 220-240	110/240	110
Rated Speed (rpm)	0-430/0-760	110/175/245/385	-	-	-	390
No load speed	700/1200	700/1200	17500/21500	1600-4800	3800	650
Max drilling wood/aluminum/steel	65/28/16	100/60/32	-	-	-	-/-/30
Weight (Kg)	3.2	6.9	-	3.4	18	10



# Power Tools



**M18 CCS55-502 FUEL CIRCULAR SAW**  
**CODE: : MIL4933448158**



**M18 CCS66 FUEL CIRCULAR SAW 66**  
**CODE: : MIL4933451385**



**MILWAUKEE CS60 184MM 110V CIRCULAR SAW**  
**CODE: AEGM010**



**MILWAUKEE CS85 235MM SB 110/120V CIRCULAR SAW**  
**110V - CODE: MIL4933451118**  
**230V - CODE: MIL4933451129**



**MILWAUKEE M18 SMS 216-0 M18 HEAVY DUTY SLIDING MITRE SAW**  
**CODE: AEGM127**



**MILWAUKEE MS305DB SLIDING MITRE SAW 110/220V**  
**110V - CODE: AEGM102**  
**220V - CODE: AEGM102B**

Model	CCS55-502	CCS66	CS60	CS85	SMS216-0	MS305DB
Batter pack capacity Ah	5.0	5.0	-	-	-	-
Battery Type	Li-ion	Li-ion	-	-	Li-ion	-
By technology new	Fuel	Fuel	-	-	-	-
Power Input (W)	-	-	1600	2200	-	1800
Rated Volatage (V)	18	18	110/240	110/240	18	110/240
No load speed (rpm)	5000	5000	5800	4500	2700	3200
Weight (Kg)	3.2	4.2	4.8	6.6	14.5	29.5

# Power Tools



**PREDATOR GP255S SLIDING  
COMPOUND MITRE SAW (110V & 220V)**

**110V - CODE: DPT022  
220V - CODE: DPT022A**



**MILWAUKEE MSUV275 MITRE SAW STAND**

**CODE: AEGM103**



**MILWAUKEE M18BJS-402 JIGSAW**

**CODE: MIL4933451390**



**MILWAUKEE JSPE135 TX 110/220V JIGSAW**

**110V - CODE: AEGM007  
220V - CODE: AEGM007A**



**MILWAUKEE M18BP-402C BATTERY PLANER**

**CODE: MIL4933451115**

Model	GP255S	MSUV275	BJS-402	JSPE135	BP-402C
Batter pack capacity Ah	-	-	4.0	-	4.0
Battery Type	-	-	Li-ion	-	Li-ion
By technology new	-	-	Brushed	-	Brushed
Base size (mm)	460x450	1170	-	-	-
Power Input (W)	-	-	18	750	-
Max Cutting Capacity Steel/Wood	90Mitre: 300mm x 60mm (11-13/16 X 2-3/8 in.) 45Mitre: 212mm x 60mm (8-3/8 X 2-3/8 in.)	-	10mm/135mm	10mm/135mm	2mm/na
Weight (Kg)	19.5	26.0	2.5	2.5	2.7

# Power Tools



**MILWAUKEE NAILER  
M18CN16GA-0/202**

**16GA-0 - CODE: MIL4933451958**  
**16GA-202 - CODE: MIL4933451571**



**MILWAUKEE NAILER  
M18CN18GS-0/202**

**N18GS-0 - CODE: MIL4933451959**  
**N18GS-202 - CODE: MIL4933451574**



**MILWAUKEE M18CRAD-502 FUEL  
RIGHT ANGLED DRILL**

**CODE: MIL4933415351**



**MILWAUKEE M18FSGC-202X FUEL DRYWALL  
SCREW GUN & CA55 COLLATED ATTACHMENT**

**GUN - CODE: MIL4933459200**  
**ATTACHMENT - CODE: MIL4933459202**

Model	CN16GA-202X	CN18GS-202	CRAD-502	FSGC-202X
Batter pack capacity Ah	2.0	2.0	5.0	2.0
Battery Type	Li-ion	Li-ion	Li-ion	Li-ion
By technology new	Fuel	Fuel	Fuel	-
charger	-	40min	59min	26min
collation angle (degrees)	20	0	-	-
cycle rate	900	900	-	-
magazine capacity nails	110	110	-	-
nail diameter (mm)	1.6	1.2	-	-
nail type (mm)	32/63	16/54	-	-
voltage (V)	18	18	18	18
weight (Kg)	3.3	3.1	4.1	2
No load speed (rpm)	-	-	0 - 1200	0-4500
Max Torque (Nm)	-	-	25	-
Max Drilling Wood – Auger	-	-	26/102/51	-
/Hole saw/Self feed bit (mm)				

# Power Tools



**MILWAUKEE M18FPP2A FUEL COMBI KIT (FPD & FID) - ONEKEY**

**CODE: MIL4933451517**



**MILWAUKEE M18FPP2B FUEL COMBI KIT (FPD & FIW) - ONEKEY**

**CODE: MIL4933459399**



**MILWAUKEE M18FDP-502**

**CODE: MIL4933451062**



**MILWAUKEE M18BPD-402**

**CODE: AEGM089**

Model	M18FDP-502	M18BPD-402	M18FPP2A	M18FPP2B
Batter pack capacity Ah	5.0	4.0	5.0	5.0
Battery Type	Li-ion	Li-ion	Li-ion	Li-ion
By technology new	Fuel	Brushed	Fuel	Fuel
charger	59 min	80 min	59 min	59 min
Chuck capacity	13	13	-	-
Max drilling steel/mason/wood	13/13/45	13/16/38	-	-
Max percussion rate	0-32000	0 - 28800	-	-
Max torque	135	60	-	-
No load speed	0-550./0-2000	0-450/0-1800	-	-
Voltage	18	18	18	18
Weight (Kg)	2.5	2.1	-	-



# Power Tools



**MILWAUKEE M18 TLED  
TORCH WORK LIGHT**

**CODE: AEGM088**



**MILWAUKEE M18  
IL STICK LIGHT**

**CODE: MIL4932430564**



**MILWAUKEE M18 LL  
'TRUE VIEW' LED LANTERN**

**CODE: MIL4932430563**



**MILWAUKEE M18 SAL-0  
'TRUE VIEW' LED STAND LIGHT**

**CODE: MIL4933451246**



**MILWAUKEE M18HSAL-502  
ROCKET LED TOWER LIGHT  
CHARGER C/W 110V OUTPUT**

**CODE: MIL4933451897**



**MILWAUKEE M18 AL-0  
'TRUE VIEW' LED AREA LIGHT**

**CODE: AEGM101**



**MILWAUKEE M18 HAL  
110V LED**

**CODE: MIL4933451263**

Model	TLED	IL STICK LIGHT	LL-0	SAL-0	HSAL-502	AL-0	HAL
Batter pack capacity Ah	-	-	-	-	5.0	-	-
Battery Type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
By technology new	Brushed	Brushed	Brushed	Brushed	Brushed	Brushed	Brushed
charger	-	-	-	-	100 min	-	-
Max light output (lumens)	160 / - / - / -	300 / - / 130 / -	700 / 350 / 70 / 700	2000 / 1300 / 850 / -	3000 / 1500 / 700 / -	1500 / - / 780 / -	3000 / 1500 / 650 / -
Max run time	29 / - / - / -	17 / - / 36 / -	10 / 20 / 100 / 16	4 / 6 / 10 / -	2.25 / 4.25 / 8 / -	5 / - / 10 / -	2 / 4 / 9 / -
Voltage DC	18	18	18	18	18	18	18
Weight	0.7	1.2	1.4	-	8.5	2.1	3.4

# Power Tools



**MILWAUKEE M18 GG  
GREASE GUN**

**CODE: AEGM069**



**MILWAUKEE C18PCG-310  
CAULKING GUN**

**CODE: RPTC18PCG310C-21V**



**MILWAUKEE M18RC-0  
RADIO**

**CODE: AEGM129**



**MILWAUKEE M18 JSRDAB+-0  
JOBSITE RADIO**

**CODE: MIL4933451252**



**MILWAUKEE M18 4AH  
BATTERY B4**

**CODE: MSS4932430063**



**MILWAUKEE M18 5AH  
BATTERY B5**

**CODE: MIL4932430483**

Model	GG-0	C18PCG-310	RC-0	JSRDAB	M18 B4	M18 B5
Batter pack capacity Ah	-	2.0	-	-	4.0	5.0
Battery Type	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion	Li-ion
By technology new	Brushed	Brushed	Brushed	Brushed	-	-
charger	-	40min	-	-	-	-
Pressure (bar)	562	-	-	-	-	-
Voltage DC	18	18	18	18	18	18
Weight	-	2.3	7.7	4.9	-	-
Dimensions	-	-	300 x 307 x 370	402 X 197 X 197	-	-
Speaker output W	-	-	40	-	-	-

# Power Tools



**MILWAUKEE M18 6AH  
BATTERY B6**

**CODE: MIL4932451244**



**MILWAUKEE M18 9AH  
BATTERY B9**

**CODE: MIL4932451245**



**MILWAUKEE M1418C6 MULTIBAY  
CHARGER 110/220V**

**CODE: 110V - RSP4932430087  
220V - MIL4932430310**



**MILWAUKEE M18VC-0  
VACUUM**

**CODE: AEGM074**



**MILWAUKEE AS300 EMAC M CLASS  
110V DUST EXTRACTOR AUTO CLEAN**

**CODE: MIL4933451036**

Model	M18 6AH	M18 9AH	M1418C6	M18VC-0	AS300
Batter pack capacity Ah	6.0	9.0	2.0,4.0,5.0, 6.0,9.0	-	-
Battery Type	Li-ion	Li-ion	Li-ion	Li-ion/pbs3000	Li-ion/pbs3000
By technology new	-	-	Brushed	Brushed	Brushed
Max Vacuum (mbar)	-	-	-	-	250
Voltage DC	18	18	-	18	18
Weight	-	-	-	5.4	10.0
Power Input W	-	-	-	-	1500

# Power Tools



**DW50 WET/DRY VACUUM DUST EXTRACTOR**

**CODE: DPT018**



**EIBENSTOCK EMF150 110/220V WALL CHASER**

**110V - CODE: EIB150  
220V - CODE: EIB1502**



**EIBENSTOCK EMF180 WALL CHASER: EIB180**

**CODE: EIB180**



**EIBENSTOCK EBS125 110V CONCRETE GRINDER**

**CODE: EIB125**



**EIBENSTOCK ELS225 LONG REACH DRY WALL SANDER**

**CODE: EIBELS225**



**EIBENSTOCK EBS180H HH CONCRETE GRINDER**

**CODE: EIB180H**

Model	DW50	EMF150	EMF180	EBS 125.4 O	ELS225	EBS18H
Power (W)	1200	2300	2300	1500	750	2.500
Voltage	110V/50Hz	110V/50Hz	110V/50Hz	110V/50Hz	110V/50Hz	110V/50Hz
Max Airflow	4000 l/min (141.3 CFM)	-	-	-	-	-
Max suction (lift)	25 kpa (250 mbar, 100.4 inches of water)	-	-	-	-	-
Protection	IP 44	-	-	-	-	-
Max dust capacity	25 L (6.6 gallons)	-	-	-	-	-
Max connected power tool	2200 W	-	-	22.2mm	-	-
Weight (Kg)	12.9	5.8	7.5	4.7	4.9	8.4
Speed (rpm)	-	4300	2200	10000	1,050-1,600	2200
No Load Speed (rpm)	-	7500	3100	-	-	9.500
Disc Diameter (mm)	-	150	180	125	225	180
Max Cutting Depth/Width (mm)	-	45/46	60/46	-	-	-



# Paddle Mixing



**BELLE PROMIX 1600 E 110V  
PADDLE MIXER**

**CODE: PROM03**



**EIBENSTOCK EHR18 S SET 110V  
PADDLE MIXER**

**CODE: EIBEHR18S**



**EIBENSTOCK EHR20/2.5 S SET  
110V PADDLE MIXER**

**CODE: EIBEHR20/25S**



**EIBENSTOCK EHR23/2.4 S SET  
110V PADDLE MIXER**

**CODE: EIBEHR23/24S**



**EIBENSTOCK EZR 22R R/L SET  
TWIN STIRRER**

**CODE: EIBEXR22R**



**BELLE TUB MIX 50**

**CODE: TM50110**

Model	Promix 1600E	EHR 18 S	EHR 20 S	EHR 23 S	EZR 22R	TUBMIX 50
Motor Power (w)	1600	1100	1300	1800	1300	1200
Rated Voltage (V)	-	110	110	110	230	110/230
Max Mixing Capacity (L)	227	-	-	-	-	50
Speed Range (rpm)	153-670	0 - 450	0-250/0-450	0-250/0-580	140-400	55
No load speed (rpm)	-	800	400/730	440/970	-	-
Paddle Diameter (mm)	160	120	140	180	220	500
Paddle Fitting	M14x2	M14	M14	M14	Special	-
Noise Level (dBA)	74	-	-	-	-	-
Weight (Kg)	6.2	4.1	5.1	6.9	6.7	25

# Concrete Coring



**EIBENSTOCK EDH2000S DRY  
CORE DRILL 110V**  
**CODE: : EHD2000**



**EIBENSTOCK EHD1801 DRY CORE  
DRILL 110V**  
**CODE: EIB1801**



**EIBENSTOCK ETN162/3  
DIAMOND WET CORE DRILL**  
**CODE: EIB162**



**MESTO PRESSURISED WATER  
CONTAINER/DUST SUPPRESSOR**  
**CODE: MES3270W**



**EIBENSTOCK CORE RIG KIT  
DBE162 (ETN162/3 & BST182 V/S)**  
**CODE: EIB162DBE**



**EIBENSTOCK CORE RIG KIT  
COMPLETE DBE352**  
**CODE: EIB352DBE**  
**CODE: EIBBST182**

Model	EHD 2000 S	EHD 1801	DBE 162	DBE 352
Power Input (w)	1700	1800	2200	3000
Rated Voltage (V)	110	110	110	110
Speed Range (rpm)	0-1000/0-2000	0-550	0-510/0-1150/0-2500	230/500/1030
No load speed (rpm)	1500/3000	800	-	-
Drilling Diameter (mm)	32-132	132 – 150	-	42-352
spindle connection	M18 female	M18	G1/2 female 11 1/4	11/4 Male
Collar Diameter (mm)	53	53	60	-
Weight (Kg)	5.5	5.7	6.7	35

# Power Washers

## ELECTRIC POWER WASHERS

Comet supply a wide range of electric power washers, including models from semi-professional to professional. These High quality Washers are manufactured in Italy using modern standards.



**COMET KS1600 CLASSIC  
POWER WASHER**

**CODE: CMT002**



**COMET KSM1480 ELECTRIC  
POWER WASHER**

**CODE: CMT002A**



**COMET KS1600 EXTRA  
POWER WASHER**

**CODE: CMT001**

Model	KSM 1480	KS1600 CLASSIC	KS1600 EXTRA
Motor Pump	-	-	KSR
Power Input (V)	230	230	230
Pressure (bar)	150	145	145
Flow Volume (L/m)	8	8.5	8.5
Dimensions (cm)	89x32x38	89x32x38	89x32x38
Weight (Kg)	17	17	19

# Power Washers



**COMET KA3000 CLASSIC  
ELECTRIC POWER WASHER**  
**CODE: CMT004A**



**COMET KA2800 CLASSIC  
ELECTRIC POWER WASHER**  
**CODE: CMT004**



**COMET K250 CLASSIC  
ELECTRIC POWER WASHER**  
**CODE: CMT004B**



**COMET K250 EXTRA ELECTRIC  
POWER WASHER**  
**CODE: CMT250**



**COMET K803S STEEL  
ELECTRIC POWER WASHER**  
**CODE: CMT803**

Model	KA 2800 CLASSIC	KA 3000 CLASSIC	K250 CLASSIC	K250 EXTRA	K803S
Motor Pump	GXR	AXR	LW-K	LW-K	ZW-K
Motor Power (Hp)	2.6	3.0	3.0	3.0	3.0
Voltage (V)	230	230	230	230	230
Pressure (bar)	140	130	150	150	120
Flow Volume (L/m)	540	720	600	600	660
Tank (L)	3.0	3.0	3.5	3.5	-
Power (kW)	2.6	2.9	2.9	2.9	2.9
Dimensions (cm)	44x42x94	44x42x94	54x44x68	54x44x99	90x62x84
Weight (Kg)	36	36	40	50	62



# Power Washers



## COMET SCOUT K150 230V HOT WASH

- 2800rpm
- Comet electrical pump with three axial pistons arranged horizontally with pump at the bottom and an all-metal construction without any plastic used for the structural components.
- Brass pump head Pressure gauge.
- Built-in fuel and detergent tanks
- Direct low-pressure suction of water with detergent
- EASY-START device
- Total Stop device
- Delayed burner start
- Safety valve
- Amperometric motor protection
- Temperature setting thermostat

**CODE: CMT005A**



## COMET KM CLASSIC 230V/380V HOT WASH

- 1400rpm
- 8-litre capacity fuel tank with level float and fill up filter
- 4-pole motor (1400 rpm) with Comet LW-K, ZW and
- FW2 with water tank and integrated valve on LW-K
- FW2 pump with flanged valve on 8.15 models
- Delayed Total Stop
- EASY-START on single-phase models
- Delayed burner start
- Professional safety valve
- Boiler thermal protection
- Rotary On-Off switch
- Contactor and motor protection with amperometric control
- Temperature setting thermostat

**230V - CODE: CMT005**

**380V - CODE: CMT005B**

Model	KM CLASSIC 230v	KM CLASSIC 380v	SCOUT 150
Motor Pump	LW-K	FW2	KSR
Motor Power (Hp)	3.0	3.0	-
Voltage (V)	230	380	230
Pressure (bar)	120	200	150
Temperature	110	110	90
Fuel Capacity (L)	18	18	15
Flow Volume (L)	3.5	3.5	3.11
Tank (L)	3.5	3.5	4.5
Power (kW)	2.9	6.5	2.7
Dimensions (cm)	95x62x85	95x62x85	89x50x82
Weight (Kg)	105	125	85

PETROL POWER WASHERS



PREDATOR 2000PSI 7HP / 2700PSI 9HP  
GEARBOX REDUCED POWER WASHER

2000PSI 7HP - CODE: DPT051  
2700PSI 9HP - CODE: DPT053

Model	2000psi	2700psi
Engine Type	Loncin G210	Loncin G270
Max Pressure (psi)	2000	2700
Frame	Heavy duty powder coated	Heavy duty powder coated
Pump	Commercial grade triplex	Commercial grade triplex
Gearbox Reduced	Yes	Yes
Max Volume (L/m)	12	14
Power (hp)	7	9
Weight (Kg)	43	60

# Power Washers



**LONCIN 2200PSI 7HP COMET GEARBOX  
DRIVEN PETROL POWER WASHER**

**CODE: WP0009A**



**HONDA 2200PSI 6.5HP COMET GEARBOX  
DRIVEN PETROL POWER WASHER**

**CODE: WP0009**



**LONCIN 2000PSI 7HP COMET DIRECT  
DRIVE PETROL POWER WASHER**

**CODE: DPT055C**



**HONDA 2000PSI 5HP COMET DIRECT  
DRIVE PETROL POWER WASHER**

**CODE: DPT0055D**

Model	Loncin 2200 7hp	Loncin 2200 6.5hp	Honda 2000 5hp	Loncin 2000 7hp
Engine Type	Loncin G210	GX200	Honda GP160	Loncin G20
Max Pressure (psi)	2200	2200	2000	2000
Frame	Heavy Duty	Heavy Duty	low profile	Tubular
Water Flow (L/m)	14	14	10	13
Pump	Comet Triplex Long Life Pump With Gearbox	Comet Triplex Long Life Pump With Gearbox	Comet AXD 3020 pump	Comet AXD pump
Power (Hp)	7	6.5	5	7
Water Supply	Self Sucking With Filte	-	-	-

# Power Washers



**Loncin 3000PSI 14HP Comet Gearbox Driven Petrol Power Washer**

**CODE: DPT065 - G420F**



**Yanmar 3000PSI 10L Comet Belt Driven Diesel Power Washer**

**CODE: WP00082 - L100N**

**CODE: WP00082C - D460F**



**Honda 3000PSI 13HP Comet Gearbox Driven Petrol Power Washer**

**CODE: WP0003C - GX390**

Stock Code	DPT065	WP0003C	WP00082C	WP00082
Engine Type	G420F	GX390	D460F	L100N
Max Pressure (psi)	3000	3000	3000	3000
Frame	Heavy/d PC Trolley	Heavy/d PC Trolley	Heavy/d PC Trolley	Heavy/d PC Trolley
Water flow (L)	21	21	15	15
Pump	Comet	Comet	Comet	Comet
Power (Hp)	14	13	10	10
Water Supply	Self-Priming	Self-Priming	Self-Priming	Self-Priming



## Power Washers



**PREDATOR**  
POWER PRODUCTS

**PREDATOR STAINLESS STEEL 18" SURFACE CLEANER**

**CODE: DPT060**



**PREDATOR STAINLESS STEEL 24" SURFACE CLEANER**

**CODE: DPT061**

# Power Washer Accessories & Parts



**POWER WASHER TRIGGER**  
**CODE: CMT24100120**



**POWER WASHER 900M STEM**  
**CODE: WSP0002**



**18FT TELESCOPIC LANCE**  
**C/W BELT KIT**  
**CODE: WSP02012**



**PREDATOR UNDER**  
**CARRIAGE CLEANER**  
**CODE: WSP02014**



**POWER WASHER NOZZLE**  
**2200PSI**  
**CODE: WSP0204**



**POWER WASHER NOZZLE**  
**3000PSI 21L/M**  
**CODE: WSP0270**



**POWER WASHER NOZZLE**  
**3000PSI 15L/M**  
**CODE: WSP0203**



**POWER WASHER NOZZLE HOLDER**  
**CODE: WSP0202**

# Power Washer Accessories & Parts



**PROFESSIONAL TURBO NOZZLE**  
**CODE: WSP0053**



**SEWER CLEANING NOZZLE**  
**CODE: WSP0003A**



**SUCTION FILTER 1/2"-3/4"**  
**CODE: WSP0007**



**9MTR HOSE 330BAR**  
**CODE: : WSP0005**



**QUICK RELEASE COUPLING F**  
**CODE: MH001A**



**QUICK RELEASE COUPLING M**  
**CODE: MH001**



**QUICK RELEASE TAIL**  
**CODE: WSP0207**



**CHEMICAL EJECTOR**  
**CODE: WSP0208**



**HEAVY DUTY UNLOADER VALVE**  
**CODE: WSP0205**

# Site Lighting & Electrical Accessories

## INDUSTRIAL QUALITY CABLE REELS



### 110 VOLT LEAD

Industrial quality 110 volt cable reel  
2 x 16 amp outlets  
3 x 2.5mm cable  
25 meter long

**CODE: EA019**



### 220 VOLT LEAD

Industrial quality 220 volt cable reel  
2 x outlets  
3 x 1.5mm or 2.5mm

### CODES:

**3 X 1.5MM 13AMP - EA085**

**3 X 2.5MM 13AMP - EA085C**

**3 X 2.5MM 16AMP - EA085A**



### LOW POWER SITE LIGHT

144 Watt & 220 Watt Low Power Site Lamps  
Professional Work Light  
Low Radiated Heat  
Compact Fluorescent Tube  
High Impact Resistant Casing  
Luminance 8250lm  
IP54  
Cover Transparent PC; Body-PP  
Product Size: 49 x 33 x 12.5cm  
Different Voltages Available

**110V - CODE: DPT110**

**220V - CODE: DPT110A**

**STAND - CODE: DPT114**



### SOLAR POWERED FLASHING LIGHT

Solar Panel: .5 W, mono-crystalline silicon;  
Battery: Including two pcs of rechargeable batteries, high quality ones;  
Viewing Distance: Over 1000m (Approx.3300 ft.), High optics vision.  
Charging: 8-hour charging=5 nights working, a full charge= upto 90 hours operation.  
Operating Time: Automatically operate from dawn to dusk

**CODE: TL003A**



### PREDATOR LOOSE LEAD 25 METER 110 VOLT

**CODE: DPT119**



### YELLOW 110 VOLT HEAVY DUTY ARTIC CABLE

### CODES:

**110V 100MTR ROLL - EA037**

**220V 100MTR ROLL - EA0372**



### POWER TOOL REPAIR CABLE H07RNF 2 CORE OR 3 CORE

### CODES:

**2CORE X 1.5MM 100MTR ROLL: MSS01**

**2CORE X 2.5MM 100MTR ROLL: MSS02**



### TWIN HEADED TRIPOD LIGHT

**CODE: MSS0024LED**



# Site Lighting & Electrical Accessories

## TRANSFORMER

A double wound isolating transformer design, thermal protected input and centre taped output complies with reduced low voltage regulations.



3.3KVA SITE TRANSFORMER



5KVA SITE TRANSFORMER



10KVA SITE TRANSFORMER 230V



10KVA SITE TRANSFORMER 380V

Model	10kVA	5kVA	3.3kVA
Power (VA)	10000	5000	3300VA
Duty	Continuous	Continuous	Intermittent
Input Voltage	230vac 1ph /380vac	230vac 1ph	230vac 1ph
Output Voltage	110vac 1ph	110vac 1ph	110vac 1ph
Sockets	4x16A 3pin, 2x32A 3pin	2x16A 3pin 1x32A 3pin	2x16A 3pin
Dimensions (HxWxDmm)	605x440x420	270x310x340	268x205x237
Weight (Kg)	67	45	17

DIABOLUX PORTABLE TRAFFIC LIGHTS

Composition

- Black polypropylene signal head
- Orange polypropylene case
- Orange steel telescoping pole with tightening knob
- Red, yellow and green 210mm lenses with large wide angle high intensity LEDs (lifetime of 300,000)

• Weight: 70kg	Electrical supply (per set of traffic light)
• Dimensions: W- 0.62m L-0.79m	- 2 12V/200Ah batteries
• Height 1.20m unextended, 2.75 extended	- 4 6V/192Ah batteries
• Synchronization key to set and operate traffic lights	- 2 stabilised mains connections
• Roadwork settings:	
-Length of roadwork (100 - 600m)	
-Traffic density (2000-11000vehicles/day)	

USE
Easy handling:
• Proven electronics identical to previous model
• For use in four and three-way intersections (for private roads)
• Manual option: steady red or steady green light
• Maintains synchronization for 20minutes (when changing battery)
• Battery status indicator
Practical:
• Handles like a two-wheel hand truck
• Set of lights can be carried in any light commercial vehical LCV

**CODES:**

**DIABOLUX PORTABLE TRAFFIC LIGHTS: WSP0207**

**DIABOLUX PORTABLE COUNTDOWN TRAFFIC LIGHTS: TL007B**

**2 WAY MODULE PROGRAMMING KEY: TLS026**

**3-4 WAY MODULE: TLSA102001059**



## DIABOLO R2 RADAR ACTIVATED PORTABLE TRAFFIC LIGHTS

- LED technology
- Radar detection for full automatical regulation of green times
  - Light sign made from black polypropylene
  - Battery box made from orange polypropylene
- Long time proven electronics
- Long time, wide-angle, high-intensity LED 210mm light clusters (service life of 100,000h)
- Telescopic post
- Ergonomic light head makes it easy to handle
- Weight of set: 70kg (minus battery)

### Recommended Power Supply:

- 2 Batteries, 12V 200Ah or 4 Batteries, 6V 192Ah or Main connection via 2 power supply
- Regulators 230/12 Volts

### Advantages:

- Long life and minimal maintenance
- Easy to put into service and configure
- Ready for hard use conditions
- Stability
- Sealed electronics
- Autonomy (5weeks)
- Easy to transport in all vehicles
- Recyclable materials
- Simplified management
- Identical to the previous FIRH model
- Tamper-proof and traceability
- Individual coding for each client

**CODE: TL007**



# Water Pumps

## ELECTRIC WATER PUMPS



**KS05 MANUAL SUBMERSIBLE  
2" WATER PUMP**

**110V - CODE: KS05SPM  
230V - CODE: KS052SPM**



**KS05A SUBMERSIBLE  
2" WATER PUMP**

**110V - CODE: KS05SPA  
230V - CODE: SP040**



**TSURUMI LC1.4S 110V  
SUBMERSIBLE PUDDLE PUMP**

**CODE: SP020B**



**TSURUMI HS2-4 SUBMERSIBLE  
2" WATER PUMP**

**MANUAL 110V - CODE: SP020A  
MANUAL 230V - CODE: SP020A2  
AUTO 110V - CODE: SP020A2B  
AUTO230V - CODE: SP020A2A**



**TSURUMI HS3-75 110V  
SUBMERSIBLE 3" WATER PUMP**

**MANUAL 110V - CODE: SP020E  
MANUAL 230V - CODE: SP020G  
AUTO 110V - CODE: SP020EA  
AUTO230V - CODE: SP020EB**



**TSURUMI LB480 SUBMERSIBLE  
2" WATER PUMP**

**MANUAL 110V - CODE: SP020D  
MANUAL 230V - CODE: SP020D2  
AUTO 230V - CODE: SP020DA**



**1" DELIVERY HOSE P/MTR - CODE: PS00101  
2" DELIVERY HOSE P/MTR - CODE: PS0010  
3" DELIVERY HOSE P/MTR - CODE: PS0011**

Model	KS05/KS05A	Tsurumi LSC1.4S	Tsurumi HS2-4/A	Tsurumi LB480/A	Tsurumi HS3-75/A
Flow (L/m)	260	170	205	225	310
Head (Mtr)	10	11	12	11	18
Power (Kw)	.4	.48	.4	.48	.75
Weight (kg)	14.5	12	11.3/11.7	10.4/10.8	16.9/17.3




# Water Pumps



**LONCIN 1" WATER PUMP:  
LC25ZB21-1.2Q**

**CODE: DPT1019**

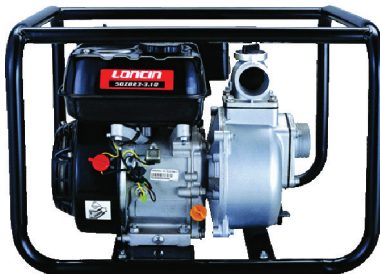


**LONCIN 2" WATER PUMP:  
LC50ZB23-3.1QA**

**CODE: DPT1020**



**LONCIN 3" WATER PUMP:  
LC80ZB20-3.1Q**

**CODE: DPT1021**

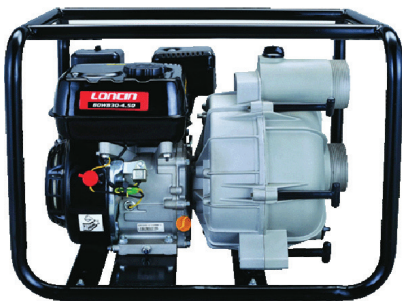

**LONCIN 3" SEWAGE PUMP  
LC80WB30-4.5Q**

**CODE: DPT1023**



**LONCIN 3" LC80ZB30-4.9CA  
DIESEL PUMP**

**CODE: SP020B**

**1" SUCTION HOSE KIT COMPLETE C/W FITTINGS 4MTR: PS0008B**  
**2" SUCTION HOSE KIT COMPLETE C/W FITTINGS 6MTR: PS0008A**  
**3" SUCTION HOSE KIT COMPLETE C/W FITTINGS 6MTR: PS00091**

- Adopting Loncin's easy-to-start, reliable and durable OHV G200F engine
- Pump body is made of light-weight but strong aluminum alloy.
- Frame-type strong pump support
- Light-weight anti-corrosion aluminum alloy and double-impeller aluminum structure
- Adopting high-quality ceramic mechanical sealing, very crucial to the water pump

Model	LC25ZB21-1.2Q	LC80ZB20-3.1Q	LC50ZB23-3.1QA	LC80WB30-4.5Q	LC80ZB30-4.9CA
Protection	Low engine oil protection device	Low engine oil protection device	Low engine oil protection device	Low engine oil protection device	-
Max Pump Lift (m)	21	20	23	30	30
Max Suction (m)	6	6	6	6	6
Delivery Volume (m <sup>3</sup> /hr)	8	60	30	45	60
Dimensions (cm)	41x30x37	55x43x46	55x43x39	59x48x44	570x490x550
Weight (Kg)	15	30	26	36	52.5

# Welding Equipment



**LONCIN PETROL WELDER  
GENERATOR DC RECOIL**  
**CODE: DPT1010**



**LONCIN DIESEL WELDER  
200AMP AC E/S**  
**CODE: DPTES200AC**



**LONCIN DIESEL WELDER  
200AMP DC E/S**  
**CODE: DPTES200**



**YANMAR 200AMP DC DIESEL  
WELDER GENERATOR E/S**  
**CODE: GP0016D**



**STEPHILL SW200AC PETROL  
WELDER GENERATOR**  
**CODE: GP0008**



**STEPHILL SW200DC PETROL  
WELDER GENERATOR**  
**CODE: GP0009**

Model	SW200AC	SW200DC
Output	200 AMP / Welding Duty: 60% @170A Maximum Rod Size 4.0mm / 230V 6.5kVA / 115V 2x2.5kVA(5.0kVA)	200 AMP / Welding Duty: 60% @170A / Maximum Rod Size 4.0mm 230V 4.0kVA / 115V 2.0kVA
Engine	HONDA GX390	HONDA GX390
Engine Type	Honda 13 HP/Loncin 14HP/Yanmar 10HP	Honda 13 HP/Loncin 14HP/Yanmar 10HP
Start	Recoil start	Recoil Start
Fuel Tank Capacity (L)	6.5	6.5
Run Time (hrs)	2.6 @ 75% Load	2.6 @ 75% Load
Noise Level (dBA)	72 @ 7 metres. 97LWA	72@ 7 metres. 97LWA
Size (mm)	L690x W480 x H540	L815x W480 x H620
Weight (Kg)	81	86

[illegible]





# DALY INDUSTRIAL SUPPLY CO. LTD.

97 Lower Glanmire Road  
Cork,  
Ireland

Tel: +353 21 4500 051  
Fax: +353 21 4508 203

Email: [sales@disc.ie](mailto:sales@disc.ie)  
Web: [www.disc.ie](http://www.disc.ie)

NOTES: The specifications, dimensional drawings and pictures are indicative only and not binding,  
Daly Industrial Supply co Ltd reserves the right to make changes without prior notice.