




ALXCEL LOOPING BLADE

Mexco Looping blades are specifically designed to produce pre-determined width slots in concrete or asphalt to insert detector loops. For use on floorsaws only. *Please ensure the floor saw being used or hired has suitable power to drive these* blades due to their extra segment width and weight. Please speak to one of our sales representatives for further details or email us at, sales@mexco.co.uk

KEY FEATURES

- Available In 6mm, 8mm, 10mm And 12mm Widths
- Heavy Duty Steel Centre
- Fast Cutting

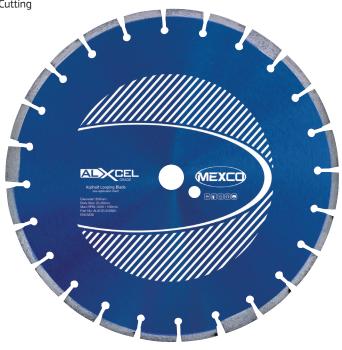

Stock Widths Available



NB: For additional widths please contact one of our sales representatives

PRODUCT OVERVIEW:

Grade: XCEL

Segment Height: 6 / 8 / 10 / 12mm Segment Type: Segmented Segment Attachment: Brazed

Gullet: Keyhole

Dry/Wet: Wet or Dry Use

Recommended for: High Power Floor Saw



OPTIMUM COST PER CUT

The XCEL range of products are simply our best in class, due to an uncompromised use of raw materials in their manufacture they offer the user a cutting or drilling experience that is faster and cleaner with an optimum cost per cut.



www.mexco.co.uk | Tel: 0845 602 4274 | Email: sales@mexco.co.uk

PRODUCT DATA SHEET

DIAMETERS AVAILABLE:

Code	Diameter		Segment Width	Bore Size / s
	(mm)	(in)	(mm)	(mm)
ALXCEL350625	350	14	6	25.4
ALXCEL350825	350	14	8	25.4
ALXCEL3501025	350	14	10	25.4
ALXCEL3501225	350	14	12	25.4

SUITABLE FOR USE ON:



WET OR DRY USE

APPLICATION:

Asphalt

Green Concrete (up to 72 hours)



Asphalt



Green Concrete



CONFORMS TO EN13236

Please note: Before using any cutting, grinding or drilling tool you should always consult your machine manufacturers hand book to establish the consumable tools suitability for the machine being used. Always wear the correct safety clothing and accessories before you commence use of the equipment.