



ASX90
GRADE

PRODUCT DATA SHEET

ASPHALT DIAMOND BLADE

PRODUCT DATA SHEET

ASX90 ASPHALT


The ASX – Asphalt diamond blade range offers fast stock removal and lifetime when used for cutting the most abrasive of applications such as asphalt, green concrete and cement screed.

KEY FEATURES

- 10mm Segment Height
- High Diamond Concentration
- Undercutting Protection
- Laser Welded Segments




Mexco Diamond Blade product packaging

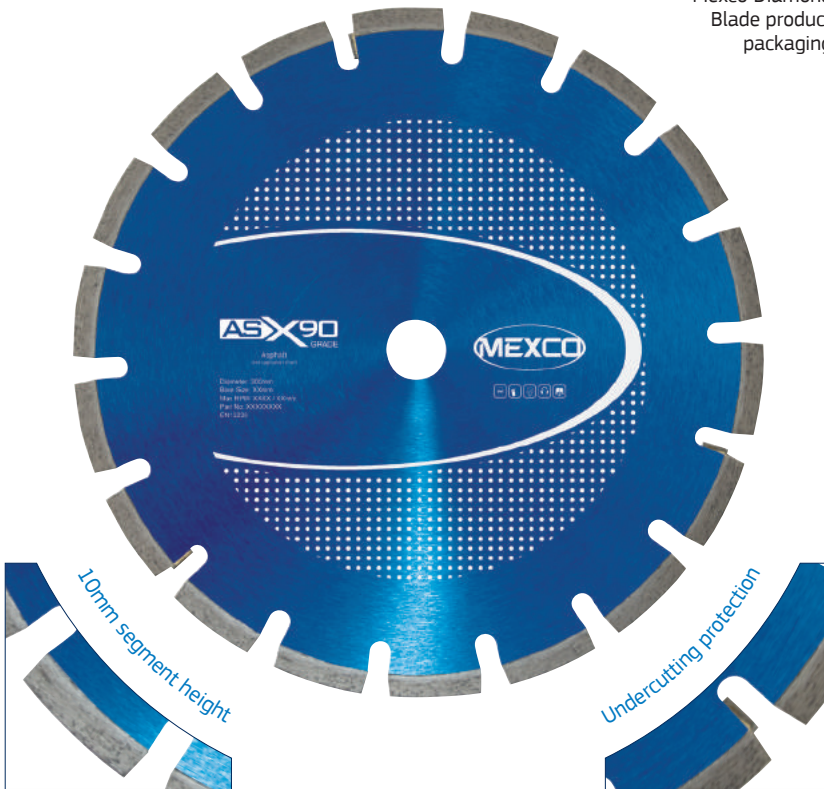

DIAMETERS AVAILABLE:

Code	Diameter		Segment Width (mm)	Bore Size / s (mm)
	(mm)	(in)		
ASX9030020	300	12	3.2	20
ASX9035025	350	14	3.2	25.4
ASX9045025	450	18	3.6	25.4

SUITABLE FOR USE ON:




APPLICATION:

- Concrete Roof Tiles
- Concrete with Med Sharp Sand
- Coarse Sandstone
- Breeze Block
- Shallow Concrete Screed
- Asphalt Over Concrete
- Concrete Block Under 15kn
- Green Concrete
- Lignacite Blocks
- Asphalt



Breeze Block



Concrete Roof Tile



Green Concrete



Asphalt

PRODUCT OVERVIEW:

Grade: X90

Segment Height: 10mm

Segment Attachment: Laser Welded

Dry/Wet: Wet or Dry Use

Recommended for: Disc Cutter, Bench Saw & Floor Saw

Segment Type: Segmented

Gullet Type: U-Slot

Undercutting Protection: Yes

X90
GRADE

LOW WEAR RATE

The X90 range of products allow a broad range of cutting applications and will provide fast cutting characteristics combined with low wear rates and an excellent lifetime.



www.mexco.co.uk | Tel: 0845 602 4274 | Email: sales@mexco.co.uk

CONFORMS TO EN13236

Please note: Before using any cutting, grinding or drilling tool you should always consult your machine manufacturers hand book to establish the consumable tools suitability for the machine being used. Always wear the correct safety clothing and accessories before you commence use of the equipment.